

**MITSUBISHI ELECTRIC**  
Changes for the Better

Mitsubishi  
**ME**lectric  
**Q**uality



Past Awards  
Reader's Digest SuperBrand & TrustedBrand (Asia or Singapore)  
2003 - 2023

Mitsubishi Electric  
**StarMEX**  
Air-Conditioner



The **No.1** Specialist in  
**Energy Saving**

At the leading-edge of air conditioning technology

**EXCELLENT**  
Energy Savings

**EASY**  
To Clean!  
Easily accessible  
Inner vent

**QUIETEST**  
19dB



Excellent  
✓✓✓✓✓  
\$259 958kWh  
Mitsubishi Electric Split type Inverter Air conditioner  
MUY-GP107 Cooling Capacity: 2.82 kW


Excellent  
✓✓✓✓✓  
\$449 1664kWh  
Mitsubishi Electric Split type Inverter Air conditioner  
MUY-2H207 Cooling Capacity: 6.31 kW

Excellent  
✓✓✓✓✓  
\$653 2418kWh  
Mitsubishi Electric Split type Inverter Air conditioner  
MUY-2H292 Cooling Capacity: 8.18 kW

Excellent  
✓✓✓✓✓  
\$714 2646kWh  
Mitsubishi Electric Split type Inverter Air conditioner  
MUY-4H292 Cooling Capacity: 8.83 kW

Excellent  
✓✓✓✓✓  
\$790 2926kWh  
Mitsubishi Electric Split type Inverter Air conditioner  
MUY-4H392 Cooling Capacity: 9.88 kW

Excellent  
✓✓✓✓✓  
\$918 3399kWh  
Mitsubishi Electric Split type Inverter Air conditioner  
MUY-5H392 Cooling Capacity: 11.18 kW

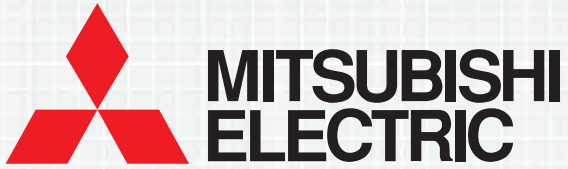

## Your Life, Our Technology – The Comfort Connection.

As everyone knows, nothing compares to the comfort that nature has to provide. Thanks to the many technical refinements, Mitsubishi Electric's air conditioner bring you closer to this ideal. Improved EER (Energy Efficiency Ratio) levels significantly reduce energy consumption while extremely quiet operation and the use of the Eco-friendly R32 refrigerant allow our series to create a naturally serene environment in every room of the house.



Inverter Multi Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
<p>MXY-2H20VF</p>  <p>up to <b>2</b> indoor units</p>	<p>DC Inverter</p>		<p>MSXY-FP10/13/18VG</p> 	18	
<p>MXY-3H28VG</p>  <p>up to <b>3</b> indoor units</p>	<p>DC Inverter</p>		<p>MSXY-FP20/24*VG</p> 	18	
<p>MXY-4H33VG</p>  <p>up to <b>4</b> indoor units</p>	<p>DC Inverter</p>		<p>PEY-M50/60*/71*JAL</p> 	18	
<p>MXY-4H38VG</p>  <p>up to <b>4</b> indoor units</p>	<p>DC Inverter</p>		<p>SEZ-M35/50*/71*DAL</p> 	18	
<p>MXY-5H48VG</p>  <p>up to <b>5</b> indoor units</p>	<p>DC Inverter</p>			18	

Line-up  
Mitsubishi Electric Room Air Conditioners

\*Not applicable to MXY-2H20VF



Inverter Single Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
MUY-GP10VF 	DC Inverter	R32 REFRIGERANT	MSY-GP10VF 	14	
MUY-GP13VF 	DC Inverter	R32 REFRIGERANT	MSY-GP13VF 	14	
MUY-GP15VF 	DC Inverter	R32 REFRIGERANT	MSY-GP15VF 	14	
MUY-GP18VF 	DC Inverter	R32 REFRIGERANT	MSY-GP18VF 	14	
MUY-GP20VF 	DC Inverter	R32 REFRIGERANT	MSY-GP20VF 	14	
MUY-GP24VF 	DC Inverter	R32 REFRIGERANT	MSY-GP24VF 	14	




Mr. SLIM Inverter Single Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
<b>SUY-ZM50VA</b> 	 	<b>PLY-ZM50EA</b> 	22		
			<b>PEY-M50JAL2</b> 		23
<b>SUY-M60VA</b> 	 	<b>PLY-M60EA</b> 	22		
			<b>PEY-M60JAL2</b> 		23
<b>SUY-M80VA</b> 	 	<b>PLY-M80EA</b> 	22		
			<b>PEY-M80JAL2</b> 		23
<b>SUY-M100VA</b> 	 	<b>PLY-M100EA</b> 	22		
			<b>PEY-M100JAL2</b> 		23
<b>PUY-M125VKA</b> 	 	<b>PLY-M125EA</b> 	22		
		<b>PEY-M125JAL2</b> 	23		
		<b>PCY-M125KAL</b> 	24		

# Cleaning-Free, Pipe Reuse Technology

## Mitsubishi Electric's Cleaning-Free Technology

Chloride residue builds up in existing pipes and becomes a source of trouble. In addition, the iron particles and slime produced as a result of compressor failure lead to problems. To counter this, various original Mitsubishi Electric technologies have been combined to enable the introduction of "cleaning-free pipe reuse."

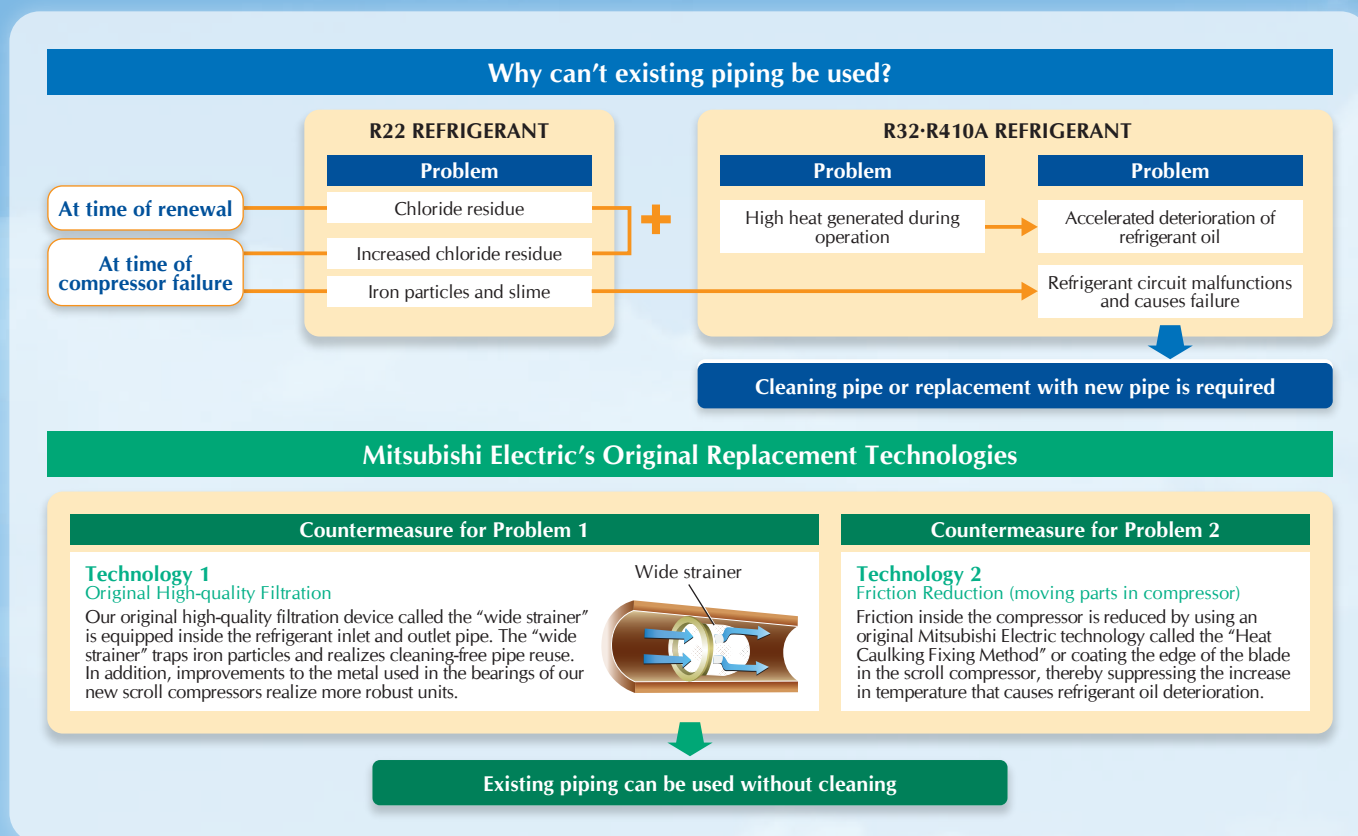

## Advantages of Mitsubishi Electric's Cleaning-Free Technology



### SHORT WORKING PERIOD

- Cut in extensive works behind walls or above ceilings to install new piping.
- Cut in difficult tasks including welding works above the ceiling.



### COST-SAVING

- Cut in material costs to install the new piping.
- Great reduction in waste materials minimizes their disposal costs.
- Short period of work saves the installation costs.



### ECOLOGY

- Waste materials, such as ceiling materials and pipes, minimized.
- Being environmentally aware by 'reusing' meets the demand of the times.

### Cautions when using existing piping

- When removing an old air conditioning unit, please make sure to perform the pump-down process and recover the refrigerant and refrigerant oil.
- Check to ensure that the piping diameter and thickness match Mitsubishi Electric specifications.
- Check to ensure that the flare is compatible with R32-R410A. (The copper pipe flare-end shape and dimensions used for R410A can also be used for R32 air conditioners.)
- Refer to full replacement catalogue for more details.

# EASY CLEAN

  
Safety system  
stops the machine  
when  
the horizontal vane  
is removed.

THE WIDE AIR OUTLET MAKES CLEANING EASY,  
ALWAYS KEEPING THE AIR IN YOUR ROOM  
**CLEAN AND FRESH.**



## EASY CLEAN's unique cleaning system

Open the blower outlet for cleaning



Vertical vanes

Front panel

Fan

### The entire front panel can be washed



Easy removal



Scrub clean

Thorough cleaning keeps your home healthier and more comfortable.

#### Eliminates odours

Always bringing you fresh air

#### Prevents mould

The mould guard (internal drier) always keeps the inside unit clean

#### Longer lasting high performance

Consistent performance from time of purchase

#### Economical energy costs


Cleaning the fan (25%), the heat exchanger (5%) and the filter (15%) increases energy savings by a total of up to 45%!





# Dual Barrier Coating

A two barrier coating prevents dust and greasy dirt from sticking onto the air conditioner.

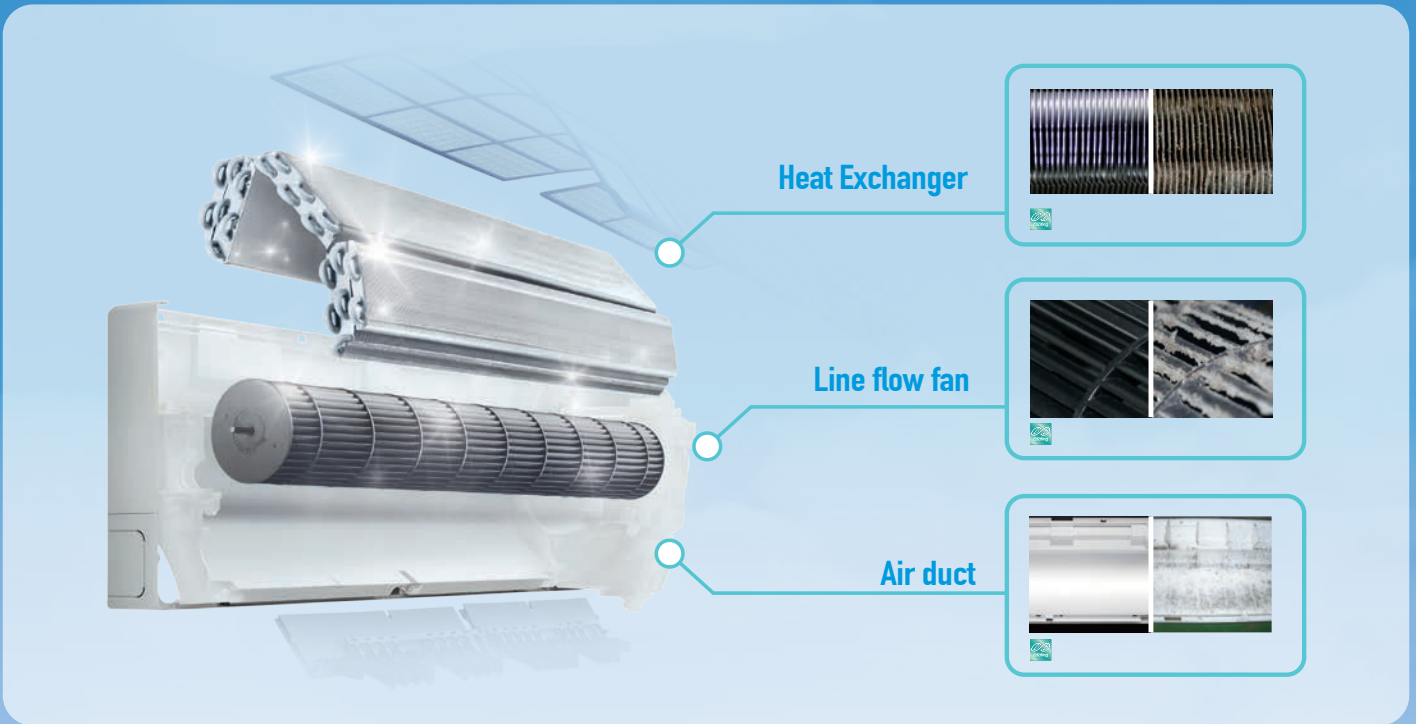


## State-of-the-art coating technology


Dirt is generally classified into two groups: hydrophilic dirt such as fiber dust and sand dust, and hydrophobic dirt such as oil and cigarette smoke. Mitsubishi Electric's dual barrier coating works as a two barrier coating with blended "fluorine particles" that prevent hydrophilic dirt penetration and "hydrophilic particles" that prevent hydrophobic dirt from getting into the air conditioner. This dual coating on the inner surface keeps the air conditioner clean year-round and improves energy efficiency while delivering comfortable clean air.



## Comparison of dirt on heat exchanger, fan and air duct (in-house comparison)

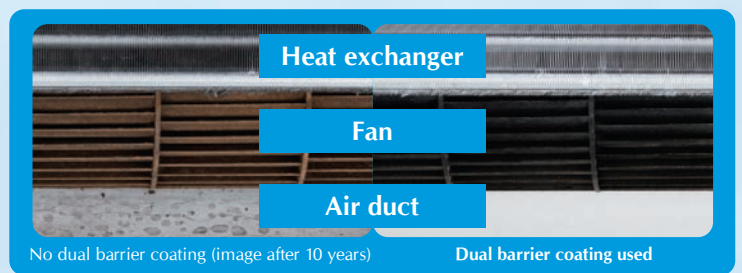

## The inside of the indoor unit gets dirty after many years of usage.

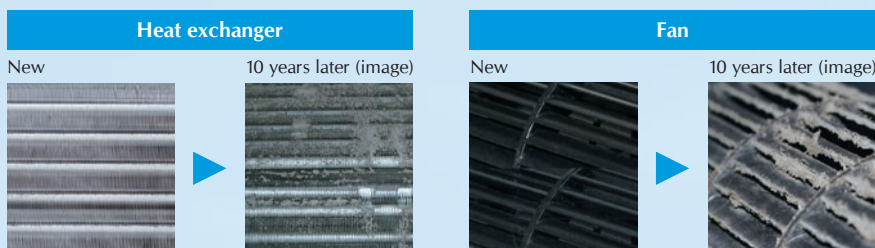

**Consequences when the inside of the indoor unit is left dirty.**


- Deterioration in energy efficiency
- Musty smell from the unit




Cleaner Air  
up to 99% PM2.5 particles filtered




## Minute Particles Floating in the Air



PM2.5



Bacteria



House dust




Model:  
**FP & GP Series**

Filter:  
Microparticle catching filter

# Microparticle catching filter effectively eliminates PM2.5


Effectively catches floating PM2.5 particles to maintain clean air in the room.

Electrostatic filter even effectively removes and eliminates miniscule particulate materials.

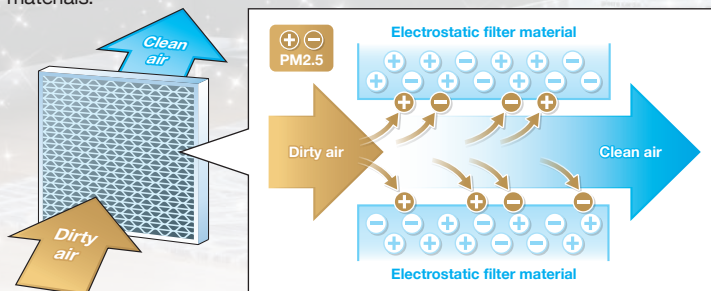

Electrostatic material removes PM2.5 from the air and absorbs it when passing through the filter

■ PM2.5 removal efficiency

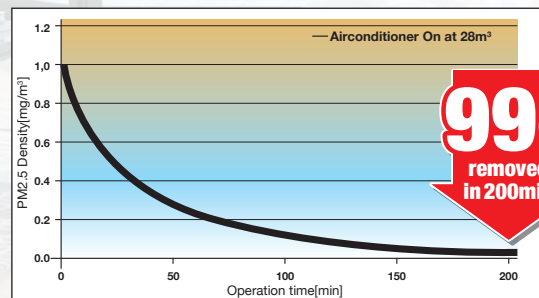


Test conditions: Removal efficiency of particulates sizes ranging 0.3-2.5µm after operation for 200min using FN20 microparticle catching filter in 28m³ enclosed space with tidal air circulation volume of 0.5/hr (in-house test)

\* Comes in 2 colors blue or white.

※ Microparticle catching filter  
MAC-EMF515FT-E (MSY-GP10/13/15/18/20VF, MSXY-FP Series)  
MAC-EMF615FT-E (MSY-GP24VF)




# NANO PLATINUM FILTER

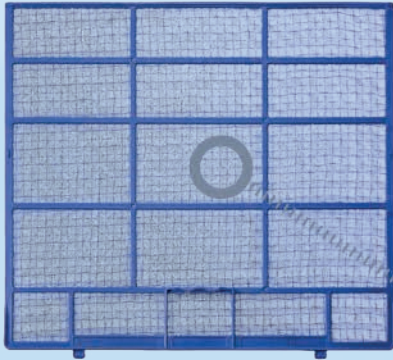

NANO PLATINUM FILTER

For an air filtration system to be practical, it has to be simple to maintain and consistently deliver clean, fresh and healthy air. Nano platinum filter can protect your family from pollutant and allergens without extra effort or maintenance.

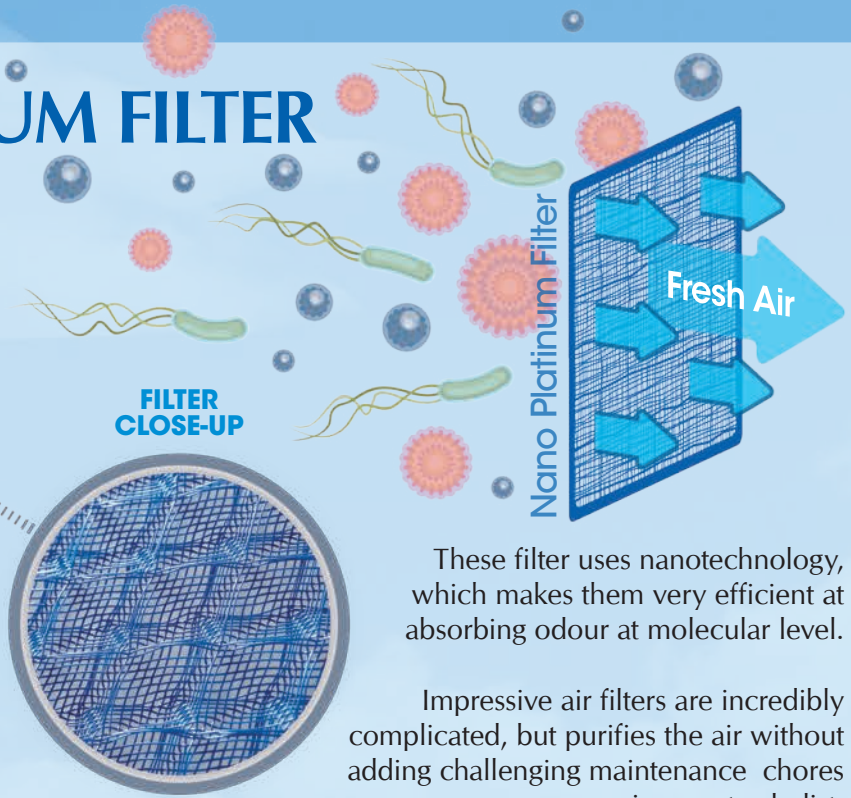

These filter uses nanotechnology, which makes them very efficient at absorbing odour at molecular level.

Impressive air filters are incredibly complicated, but purifies the air without adding challenging maintenance chores in your to-do list.




# ANTI-ALLERGY ENZYME FILTER (OPTIONAL)

The filter catches dead mites and their droppings, pollen and other allergens on the filter filament, then decompose them with artificial enzymes. This break down allergen proteins into non allergen proteins. The complicated process involves destruction of undesirable proteins S-S bonds. The result is healthier, purer air.



ANTI-ALLERGY ENZYME FILTER

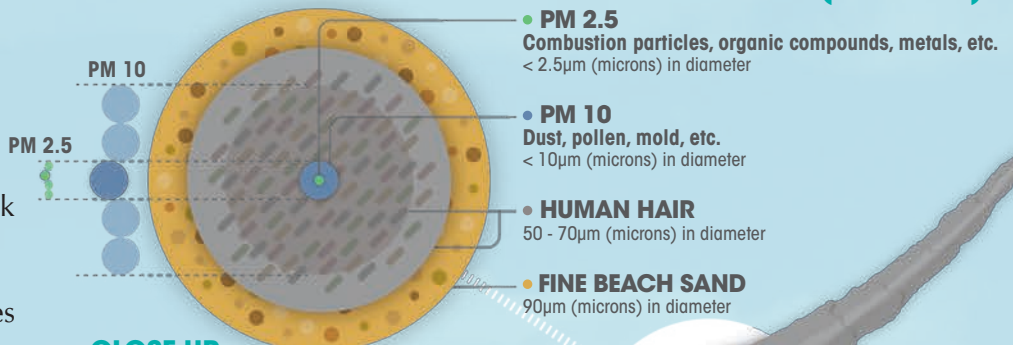


**CLOSE-UP COMPARISON**  
(microns) in diameter

The filter attacks particles a thousand times smaller than the diameter of human hair.



Neutralizes  
**99.9%**  
VIRUS &  
BACTERIA  
within  
**24**  
HOURS

## ELECTROSTATIC ANTI-ALLERGY ENZYME FILTER MECHANISM

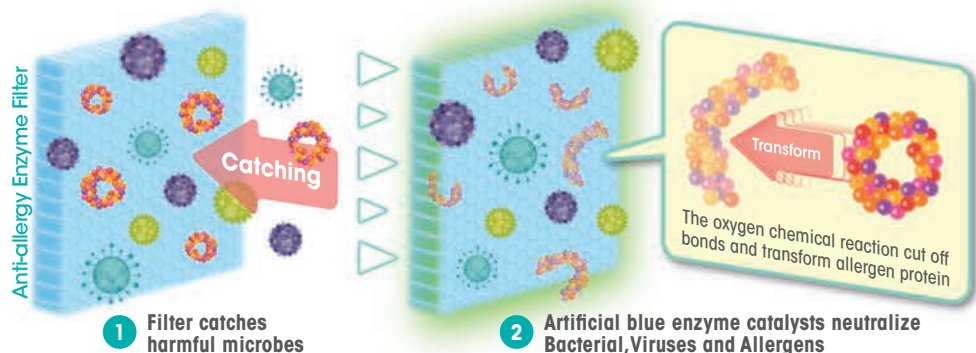



# Easy, Clean & Comfortable




## Easy Clean Design

The easily detachable panel is a snap to wash and the airflow vents can be opened without any special tools for quick cleaning of the inside of the air conditioner. It is recommended that the air conditioner be cleaned regularly as this will increase both operating efficiency and energy savings. Always clean the heat exchanger, fan and air vent to ensure proper performance and economical operations.



## Anti-Rust Treatment (Blue Fin)

Each cabinet of the outdoor unit has been applied with a special anti-rust treatment.

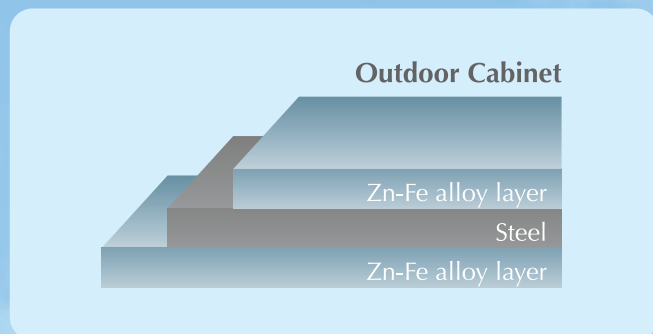

## Fuzzy Logic "I Feel"

Is the room too hot, too cold, too dry or too humid? On auto mode selection, the fuzzy logic control system adjusts condition to suit you. Your selected temperature setting will be stored in the memory system and generate automatically every time you operate the aircon.



## Auto Mode

We offer you an easy way to comfort with auto mode. "Auto Vane" is created to set the vane angle automatically. "Auto Fan" is created to adjust airflow speed automatically. These allow ideal temperature to be achieved in the shortest time.



## LCD Remote Controller

From temperature and operation modes to air volume and direction, you will be able to customize your environment at the touch of the button. Large and easy to identify buttons allow easy access to frequent used functions. The LCD display allows you to check temperature and operating condition at a glance with an easy slide cover that prevents inadvertent operations of preset controls and other functions.



# Mitsubishi Electric's Main Technology

## Inverter Technology

### DC Inverter The Quiet Air Conditioner in the Market

A high efficiency DC motor drives the fan of the outdoor unit. It offers up to 60% greater efficiency than an equivalent motor.




### Joint Wrap DC Motor

Mitsubishi Electric's unique Joint Wrap Motor is environmentally friendly, using less copper wiring than conventional motors through the employment of joint wrap production techniques. This concentrated winding DC motor features our original high density, concentrated winding technique and a reliable, high efficient motor.



### PAM Control Pulse Amplitude Modulation


Electricity can be used efficiently with less loss, the current wave resembles the supply voltage wave. PAM is a method for controlling the form of waves so that it conforms to the supply voltage waves. With PAM, 98% of input power supply is effectively used.

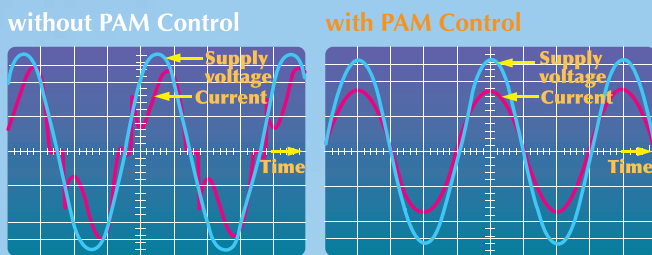

PAM adjusts the form of current wave so that it is close to that of the supply voltage wave. High harmonics is reduced and 98% of the electricity is utilized.

### Higher Speed Cooling

Our advanced inverter technology enables efficient high-speed cooling by precisely and flexibly controlling the rotation of the compressor according to individual cooling needs. Example, during summer months, the compressor speed is automatically set at a maximum level of 30% faster than non inverter models. Thus, the room takes lesser time to cool.

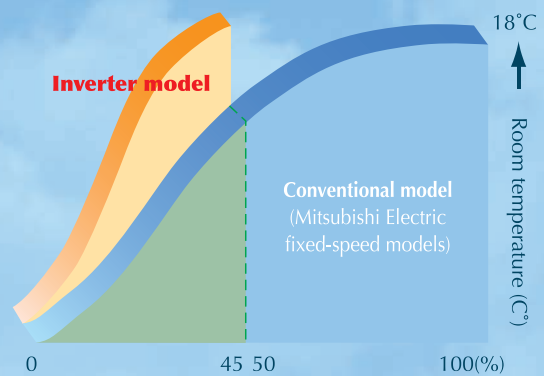


Compared to conventional models, desired temperatures are reached much more rapidly.

### Optimum Comfort Year-Round

To ensure that a room is never too cold or too hot, inverter technology allows the air conditioner to detect subtle fluctuations in room temperature and adjust automatically. Unlike conventional air conditioning units that must start or stop repetitively, inverter units offer finely tuned operation - such as the accurate control of compressor rotation - for a more comforting airflow and far less temperature variations.


### Using a Motorcycle as an Example

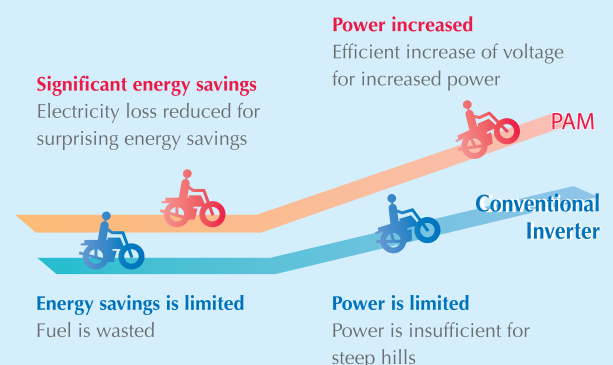

\*This diagram illustrates the merits of PAM Control.


# Silent Operation & Energy Saving Technology

**Only 19dB** The Quiet Air Conditioner in the Market

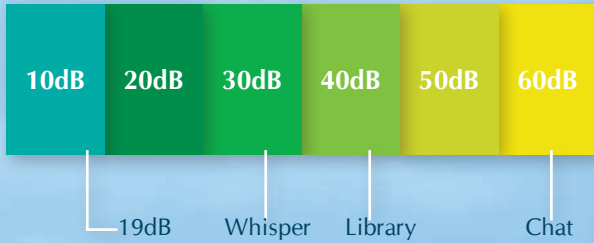

Noise level for silent mode operation is only at 19dB for MSY-GP10VF and MSXY-FP10,13VG making them one of the quiet units in the market. The multi-angled heat exchanger has a modified fin shape that reduces air resistance for a smoother, quieter airflow. The wide fan diameter produces great airflow at lower fan speeds and the uneven pitch between each fan blade helps to eliminate noise.


## Twin Rotary Compressor ensure Peace and Quiet

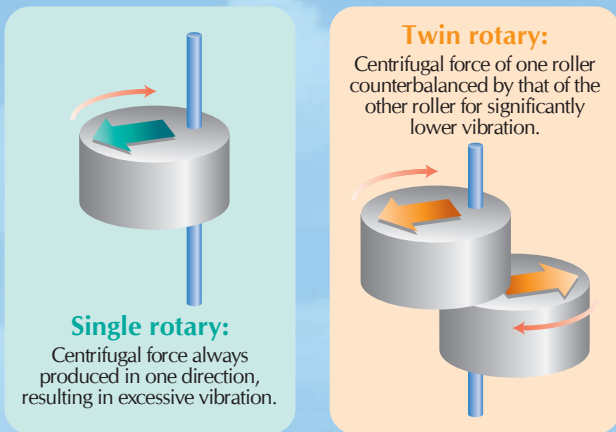

Unlike conventional models with single rotary, all Inverter Multi Split System outdoor units feature a twin rotary compressor that provides balanced rotation as the centrifugal force of one roller is counterbalanced by the other. This significantly reduces both vibration and noise. This is why Mitsubishi Electric's outdoor units are so peacefully quiet.


**NEW LEV** New LEV Control

Linear Expansion Valve automatically adjusts the volume of refrigerant flowing through the air conditioner according to air conditioning load. When the load is low, Needle A drops, restricting the flow path and decreasing the volume of refrigerant. Circulation is then optimized to facilitate more economical operation.



**Econo Cool** Econo Cool – Smart Save

The Econo Cool, one touch operation automatically adjust the direction of the airflow based on the temperature at the air outlet. The set temperature can therefore be 2°C above conventional temperature setting without loss of comfort and with 20% increase in energy efficiency.

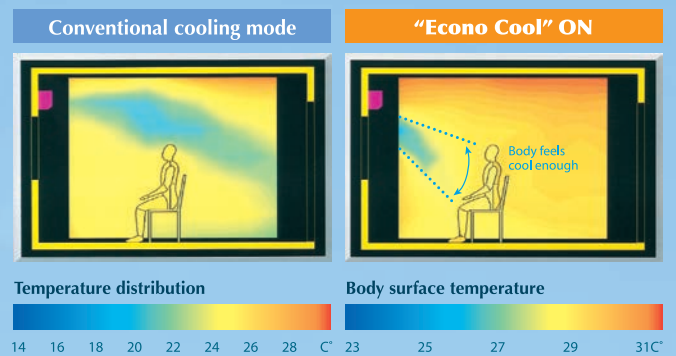

	Conventional	Econo Cool
Ambient temperature	35°C	35°C
Set temperature	25°C	27°C
Perceived temperature	30°C	29.3°C






# Benefits of R32 Gas

A new genesis gas lowering green house effect

## Low in GWP Value

Refrigerant has been a debatable topic as a contribution factor that harm the ozone layer. R32 gas - an environmentally friendly and energy efficient refrigerant offers a new alternative. Having a low GWP value of only 677, its 1/3 of the GWP value that R410A carries, lowering carbon emission by 30%.

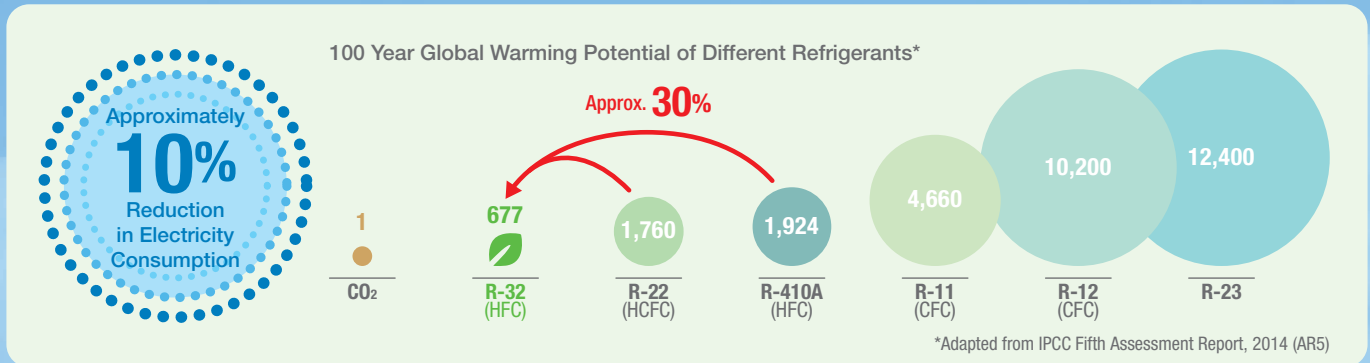

## Requires Less Refrigerant Volume

The lower density characteristic of R32 air conditioning systems require 15-20% less refrigerant than R410A equivalents, making them more efficient. This means, lower carbon emission and lower energy cost with the same performance.



## Single Component of Gas

R32 is a single compound, CH<sub>2</sub>F<sub>2</sub> unlike R410A which is a mixture of difluoromethane and pentafluoroethane. Being a single component gas, R32 gas is more convenient to R410A gas. This will result in a smaller footprint, despite using compressors with the same capacity.

## Higher Efficiency


R32 gas has a higher cooling capacity due to its higher critical temperature of 78.11°C. This results in higher efficiency and higher COP in the R32 gas system. In return, it approximately saves 10% of the electricity bill when compared to using R410A gas.



**System 5- R410A**  
 MXY-5G48VA2  
 Dimension (W x D x H)  
 950 x 330 x 1048mm



**System 5- R32**  
 MXY-5H48VG  
 Dimension (W x D x H)  
 950 x 330 x 796mm

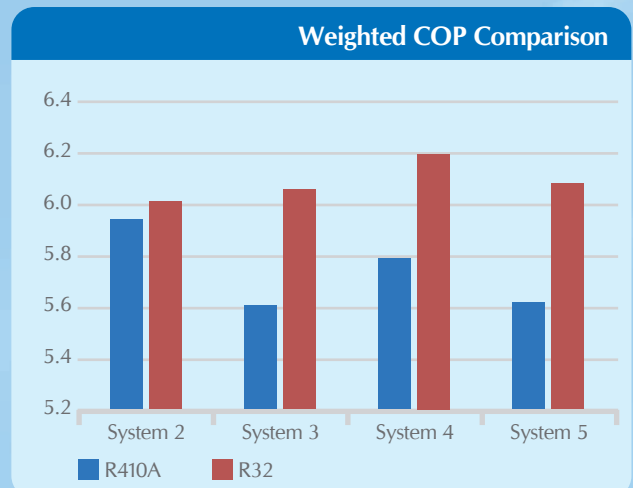

# FEATURES

## Energy Saving

- DC Inverter
- Temperature Range Restriction
- PAM Control
- New LEV Control
- Econo Cool

## Comfort

- The Quiet Air-Conditioner In The Market
- Computerised Dehumidification  
Eliminate dampness for healthier and more comfortable air-conditioning, while enjoying great year-round economy.
- 5 Step Vane Control & Swing Mode  
Five different airflow patterns & "Swing" mode match the interior layout and people in the room.
- Quiet Operation
- Powerful Cool
- Auto Mode
- Fuzzy Logic "I Feel"
- Wide Control
- Long Air-flow

## Installation & Maintenance

- Easy Clean Design
- Durable Electronic Metal Housing Box  
This special box protects the electronic circuitry from dust ensuring its reliable operation and preventing fire in the event of a short circuit.
- Anti-Rust Treatment
- Emergency Circuit Protection  
In the event of a sudden power surge, e.g. lighting, the circuits of 3 safety barriers (fuse, baristor, and surge absorber) are automatically broken first to protect the printed circuit board (PCB).
- Self-Diagnostic Function  
In the unlikely event of a malfunction, the LED on the indoor unit flashes to indicate the exact spot to be checked.

## Fresh Air

- Anti-Allergy Enzyme Filter (Optional)  
(MSY-GP10/13/15/18/20VF, MSXY-FP Series)
- Electrostatic Anti-allergy Enzyme Filter (Optional)  
The filter is charged with static electricity, enable it to trap allergens such as molds and bacteria and decompose them using enzymes retained in the filter. (MSY-GP24VF)
- Nano Platinum Filter  
The filter has a large capture area and incorporates nanometre-sized platinum-ceramic particles that work to kill bacteria and deodorize the circulating air. Better dust collection than conventional filters is also ensured.
- Microparticles Catching Filter  
Filter effectively eliminates PM2.5 particles to maintain clean air in the room. Removal efficiency of particulates sizes ranging 0.3-2.5µm after operation for 200min using MSXY-FN20VE micro-particle entrapment filter in 28m<sup>3</sup> enclosed space with tidal air circulation volume of 0.5/hr (in-house test).
- Dual Barrier Coating  
Prevents dust and greasy dirt from sticking onto the coated air conditioner.

## Convenience

- Operation Lock  
Prevent Operation settings from being changed.
- Multi-Language  
Control panel operation in eight different languages.
- 24-Hour On/Off timer  
On/Off operation can be set simultaneously in 10-minute increment for a 24-hour period.
- Weekly Timer  
Easily set desired temperatures and operation start/stop times to match lifestyle patterns.
- Auto Restart  
This function permits automatic return to previous operation conditions after a sudden power black-out. You can now sleep peacefully all through the night without having to get up and turn your air-conditioner back on.
- Smart Set  
This is a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller.

## Guaranteed Operating Range:



Mr.SLIM

	Indoor	Outdoor	Indoor	Outdoor
	MSXY-FP10/13/18/20/24VG MSY-GP10/13/15/18/20/24VF PEY-M50/60/71JAL SEZ-M35/50/71 DAL	MXY-5H48VG MXY-4H38VG MXY-4H33VG MXY-3H28VG MXY-2H20VF MUY-GP10/13/15/18/20/24VF	PCY-M125KAL PLY-ZM50EA PLY-M60/80/100/125EA PEY-M50/60/80/100/125JAL2	SUY-ZM50VA SUY-M60/80/100VA PUY-M125VKA
<b>Cooling</b> Upper limit	32°C DB / 23°C WB	46°C DB	32°C DB / 23°C WB	46°C DB

### Note

- Rating conditions: Cooling – Indoor: 27°C DB / 19°C WB; Outdoor: 35°C DB. Refrigerant piping length (one way): 5 meters / indoor unit (inverter)
- Due to the compact high efficient design of heat exchanger, the use of wall mounted and cassette fan coil units are not recommended for hair saloon and massage parlour environment. Please contact our Dealers for recommendations of appropriate models.
- For wall mounted units, during COOL or DRY operation with the vane angle at Angle 4 or 5 when the compressor cumulative operation time exceeds 1 hour, the vane angle automatically changes to Angle 3 for dew prevention.

# Inverter Single Split System



Mitsubishi Electric  
**StarMEX**  
Air-Conditioner

The GP Series is designed for optimum cooling performance as well as operational comfort. Quiet, energy-saving operation is supported by some of Mitsubishi Electric's latest technologies.



## Indoor Unit



Dimensions (W X D X H):  
799 X 232 X 290 mm

**MSY-GP10VF**  
Cooling capacity: 2.5kW



Dimensions (W X D X H):  
923 X 250 X 305 mm

**MSY-GP13VF**  
Cooling capacity: 3.5kW

**MSY-GP18VF**  
Cooling capacity: 4.8kW

**MSY-GP15VF**  
Cooling capacity: 4.2kW

**MSY-GP20VF**  
Cooling capacity: 6kW



Dimensions (W X D X H):  
1100 X 238 X 325 mm

**MSY-GP24VF**  
Cooling capacity: 6.6kW

## Outdoor Unit



**MUY-GP10/13/15VF**  
Dimensions (W X D X H):  
800 X 285 X 550 mm



**MUY-GP18/20VF**  
Dimensions (W X D X H):  
800 X 285 X 714 mm



**MUY-GP24VF**  
Dimensions (W X D X H):  
840 X 330 X 880 mm



Model			MSY-GP10VF	MSY-GP13VF	MSY-GP15VF	MSY-GP18VF	MSY-GP20VF	MSY-GP24VF						
			MUY-GP10VF	MUY-GP13VF	MUY-GP15VF	MUY-GP18VF	MUY-GP20VF	MUY-GP24VF						
Function & Type			Cooling, Wall Mounted											
Capacity (Min - Max)	kW		2.5 (1.1 - 3.5)	3.5 (1.5 - 4.1)	4.2 (1.5 - 4.8)	4.8 (1.5 - 6.0)	6.0 (1.5 - 7.2)	6.6 (2.4 - 9.2)						
Power Input	kW		0.51	0.81	0.97	1.11	1.58	1.74						
Starting Current	A		2.70	3.80	4.50	5.00	7.00	7.60						
Running Current	A		2.70	3.80	4.50	5.00	7.00	7.60						
Airflow	CMM (m <sup>3</sup> /min)		4.3-5.4-7.2-9.3-13.6	6.1-10.7-12.2-15.0-18.0	8.6-10.7-12.2-15.0-19.2	6.8-9.1-12.2-14.8-18.4	6.8-9.1-12.2-14.8-19.0	9.1-13.0-14.9-20.7						
Dimension (W X D X H)	Indoor	mm	799 x 232 x 290		923 x 250 x 305		1100 x 238 x 325							
	Outdoor	mm	800 x 285 x 550		800 x 285 x 714		840 x 330 x 880							
Net Weight	Indoor	kg	9		13		15							
	Outdoor	kg	32.0		37.0		48.5							
Indoor Sound Level*	(Silent - High) dB(A)		19-24-31-38-47	21-33-38-44-48	28-33-38-44-49	29-37-41-45-49	29-37-41-45-49	30-41-45-51						
Outdoor Sound Level*	dB(A)		46	47	50	54	57							
Connection Method			Indoor/Outdoor											
External Piping	Diameter	Gas (ø)	9.52		6.35		12.70							
		Liquid (ø)												
Piping Length	Max. length	m	20		30									
	Max. height	m	12		15									
Refrigerant			R32											
Power Supply			V, Phase, Hz											
Pre-charged Refrigerant Quantity (Max)			0.97 (0.97)		1.00 (1.00)		1.25 (1.25)		1.50 (1.50)					
Energy Labelling Scheme														

\* Note: Sound level is measured in anechoic chambers.

Conversion formula: Btu/h=kW x 3412



# Inverter Multi Split System



Mitsubishi Electric  
**StarMEX**  
Air-Conditioner



Our Inverter Technology adjusts cooling capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.

## Indoor Unit



Dimensions (W X D X H) : 799 X 232 X 290 mm

**MSXY-FP10VG**  
Cooling capacity: 2.8kW\*

**MSXY-FP13VG**  
Cooling capacity: 3.5kW\*

**MSXY-FP18VG**  
Cooling capacity: 5.0kW\*



Dimensions (W X D X H) : 923 X 250 X 305 mm

**MSXY-FP20VG**  
Cooling capacity: 6.0kW\*

**MSXY-FP24VG**  
Cooling capacity: 7.1kW\*




## Outdoor Unit

### System 3

**3** **MXY-3H28VG** Outdoor unit 1:3 Indoor units  
Rooms


(Optional drainage kit is available)

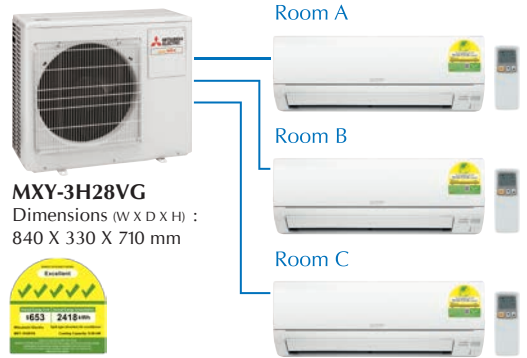

### System 4

**4** **MXY-4H33VG** Outdoor unit 1:4 Indoor units  
Rooms

(Optional drainage kit is available)

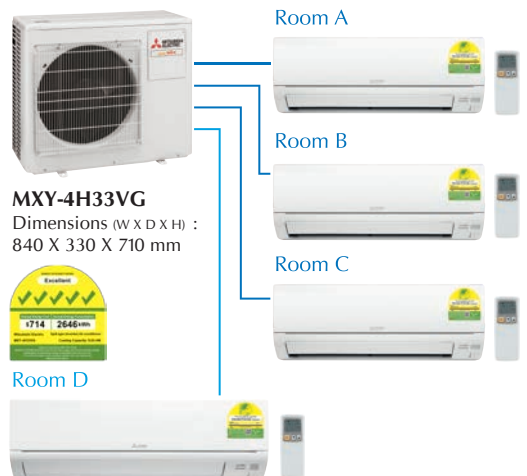

Conversion formula: Btu/h=kW x 3412 It is just a reference value. \* With single unit operation depending on combination.

# Inverter Multi Split System



Mitsubishi Electric  
**StarMEX**  
Air-Conditioner



Our Inverter Technology adjusts cooling capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.

## Indoor Unit



Dimensions (W X D X H) : 799 X 232 X 290 mm

**MSXY-FP10VG**  
Cooling capacity: 2.8kW\*

**MSXY-FP13VG**  
Cooling capacity: 3.5kW\*

**MSXY-FP18VG**  
Cooling capacity: 5.0kW\*



Dimensions (W X D X H) : 923 X 250 X 305 mm

**MSXY-FP20VG**  
Cooling capacity: 6.0kW\*

**MSXY-FP24VG\*\***  
Cooling capacity: 7.1kW\*




## Outdoor Unit

### System 4

**4 Rooms** **MXY-4H38VG** Outdoor unit 1:4 Indoor units

(Optional drainage kit is available)

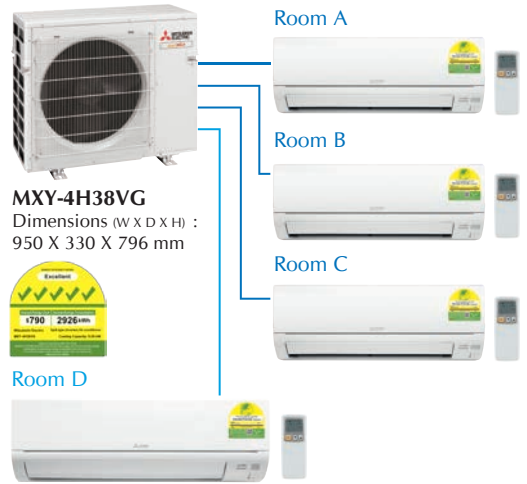


**MXY-4H38VG**  
Dimensions (W X D X H) :  
950 X 330 X 796 mm

### System 2

**2 Rooms** **MXY-2H20VF** Outdoor unit 1:2 Indoor units

(Optional drainage kit is available)

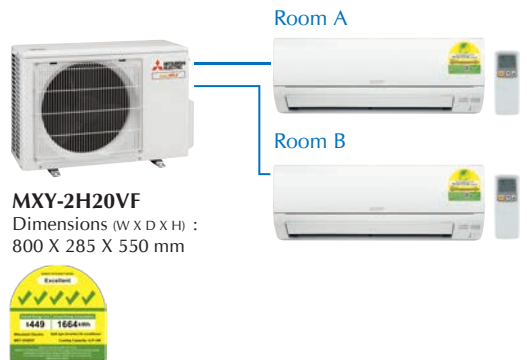

**MXY-2H20VF**  
Dimensions (W X D X H) :  
800 X 285 X 550 mm

# Inverter Multi Split System



Mitsubishi Electric  
**StarMEX**  
Air-Conditioner



Our Inverter Technology adjusts cooling capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.

## Indoor Unit



Dimensions (W X D X H) : 799 X 232 X 290 mm

**MSXY-FP10VG**  
Cooling capacity: 2.8kW\*

**MSXY-FP13VG**  
Cooling capacity: 3.5kW\*

**MSXY-FP18VG**  
Cooling capacity: 5.0kW\*



Dimensions (W X D X H) : 923 X 250 X 305 mm

**MSXY-FP20VG**  
Cooling capacity: 6.0kW\*

**MSXY-FP24VG**  
Cooling capacity: 7.1kW\*




## Outdoor Unit

### System 5

**5 Rooms** **MXKY-5H48VG** Outdoor unit 1:5 Indoor units

(Optional drainage kit is available)

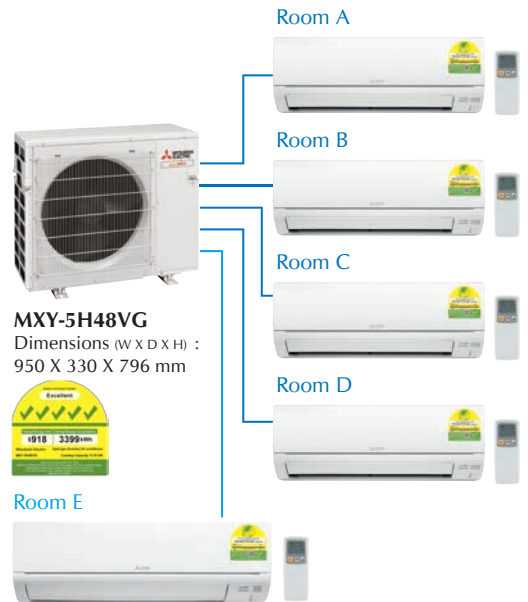

Conversion formula: Btu/h=kW x 3412 It is just a reference value. \* With single unit operation depending on combination.





Our New Starmex series range is designed to achieve industry's leading seasonal energy efficiency through use of new technologies and high-performance compressor.

## Indoor Unit




**MSXY-FP10/13/18VG**

Dimension (W X D X H): 799 X 232 X 290 mm



**MSXY-FP20/24VG**

Dimension (W X D X H): 923 X 250 X 305 mm



## Outdoor Unit



**MXY-2H20VF**

Dimension (W X D X H): 800 X 285 X 550 mm



**MXY-3H28VG / MXY-4H33VG**

Dimension (W X D X H): 840 X 330 X 710 mm



**MXY-4H38VG / MXY-5H48VG**

Dimension (W X D X H): 950 X 330 X 796 mm

## Multi Split System

Model- Indoor Unit		MSXY-FP10VG	MSXY-FP13VG	MSXY-FP18VG	MSXY-FP20VG	MSXY-FP24VG
Rated Capacity ^	kW	2.8	3.5	5.0	6.0	7.1
Power Input	kW	0.028	0.036	0.042	0.059	
Running Current	A	0.27	0.33	0.38	0.52	
Airflow Rate	CMM (m³/min)	4.1-5.1-6.3-9.1-12.9	4.1-5.1-6.3-9.1-14.1	6.2-7.7-9.5-12.1-14.8	9.3-11.1-13.7-16.1-20.0	
Sound Level *	dB(A)	19-24-29-36-45	19-24-30-36-47	28-33-38-44-49	30-35-41-45-50	
Dimension (W X D X H)	mm	799 X 232 X 290			923 x 250 x 305	
Net Weight	kg	9			13	
External Piping	Diameter	Gas (ø)	9.52			12.70
		Liquid (ø)	6.35			

Model- Outdoor Unit		MXY-2H20VF	MXY-3H28VG	MXY-4H33VG	MXY-4H38VG	MXY-5H48VG	
Capacity (Min - Max)	kW	4.5 (1.3 - 6.5)	6.5 (1.3 - 8.9)	6.9 (1.3 - 10.7)	8.0 (1.4 - 11.6)	9.2 (1.4 - 13.0)	
Power Input	kW	0.91	1.33	1.42	1.62	1.89	
Starting Current	A	4.88	5.93	6.37	7.22	8.43	
Running Current	A	4.88	5.93	6.37	7.22	8.43	
Airflow	CMM (m³/min)	32.9	38.7		59.2	64.7	
Dimension (W X D X H)	Outdoor mm	800 x 285 x 550	840 x 330 x 710		950 x 330 x 796		
Net Weight	Outdoor kg	37	55	56	58	61	
Outdoor Sound Level *	dB(A)	49					
Connection Method	Indoor/Outdoor	Flared					
External Piping	Diameter	Gas (ø)	mm	2 no X 9.52	3 no X 9.52	1 no X 12.70 + 3 no X 9.52	1 no X 12.70 + 4 no X 9.52
		Liquid (ø)	mm	2 no X 6.35	3 no X 6.35	4 no X 6.35	5 no X 6.35
Piping Length	Max Length (Each)	m	20				
	Max. Length	m	30	60		70	75
	Max. Height**	m	15				
Refrigerant		R32					
Power Supply	V, Phase, Hz	230, 1, 50					
Pre-charged Refrigerant Quantity (Max)	kg	1.20 (1.20)	1.65 (1.65)	1.85 (1.85)	2.00 (2.00)	2.20 (2.20)	
No. of connectable indoor units (System)		2	3	4		5	
Energy Labelling Scheme							

\*Note: Sound level is measured in anechoic chambers. \*\* If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 10m. ^ It depends on combination.


# FP Series



Introducing a compact and stylish indoor unit with amazing quiet performance. Having advantage of neat installations in small bedrooms made possible, and increase in energy-savings by selecting the optimal capacity required for each room.

## Low Standby Power


Electrical devices consume standby power even when they are not in actual use. While we obviously strive to reduce power consumption during actual use, reducing this wasted power that cannot be seen is also very important.

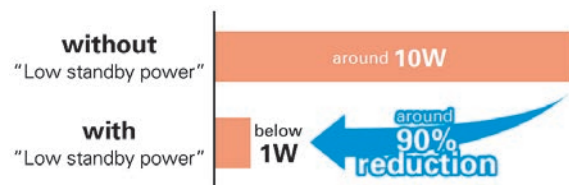

## Easy Clean Design

The easily detachable panel is a snap to wash and the airflow vents can be opened without any special tools for quick cleaning of the inside of the air conditioner. It is recommended that the air conditioner be cleaned regularly as this will increase both operating efficiency and energy-savings. Always clean the heat exchanger, fan and air vent to ensure proper performance and economical operation. It reduces your electricity bill by approx. 45%\*.

\*Electricity bill comparison of operation under fixed temperature with 8 grams of soil on the fan and one without. Based on internal company data. \*\*Cleaning of filter and heat exchanger is possible by removing the panel.

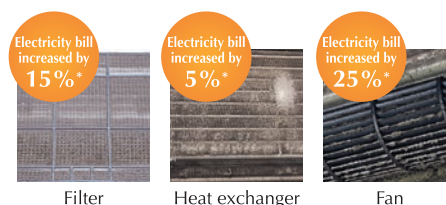

## Dual Barrier Coating

Dual Barrier Coating prevents dust and greasy dirt from sticking onto the coated air conditioner. Dirt is generally classified into two groups: hydrophilic dirt such as fiber dust and sand dust, and hydrophobic dirt such as oil and cigarette smoke. Mitsubishi Electric's unique dual barrier coating prevents both hydrophilic and hydrophobic dirt from sticking onto the air conditioner. This dual coating on the inner surface keeps the air conditioner clean all year round and improves energy efficiency while delivering comfortable clean air.




## Microparticles Catching Filter

Filter effectively eliminates PM2.5 particles to maintain clean air in the room. Removal efficiency of particulates sizes ranging 0.3-2.5 $\mu$ m after operation for 200min using MSXY-FN20VE microparticle entrapment filter in 28m<sup>3</sup> enclosed space with tidal air circulation volume of 0.5/hr (in-house test).

## Effectively catches floating PM2.5 particles to maintain clean air in the room.


■ Electrostatic filter even effectively removes and eliminates miniscule particulate materials.

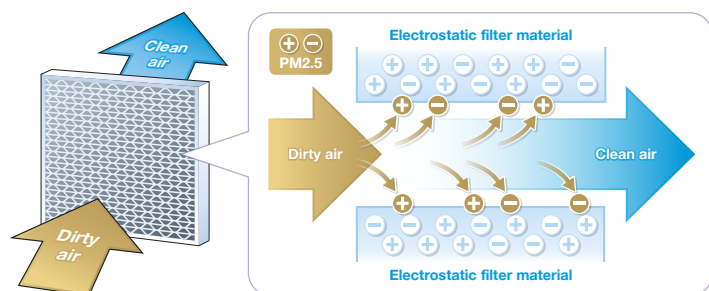

Microparticle catching filter

Electrostatic material removes PM2.5 from the air and absorbs it when passing through the filter

■ PM2.5 removal efficiency

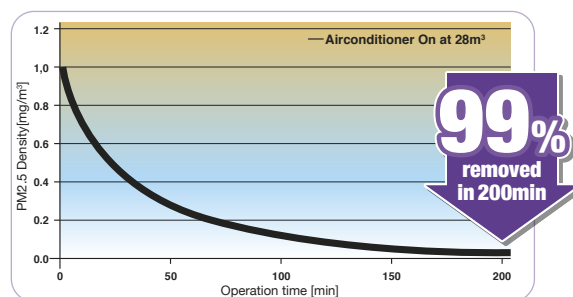

**Test conditions:** Removal efficiency of particulates sizes ranging 0.3-2.5 $\mu$ m after operation for 200min using FN20 microparticle catching filter in 28m<sup>3</sup> enclosed space with tidal air circulation volume of 0.5/hr (in-house test)

# PEY Series




This concealed ceiling-mounted indoor unit series is compact, and fits easily into bedrooms lowered ceilings. Highly reliable energy savings performance makes it a best match choice for concealed unit installations.

## Compact Ceiling Concealed Style

With our “ceiling concealed model”, the air-conditioner unit itself is enclosed in the ceiling cavity, leaving only the outlet and inlet grille mounted on the ceiling surface. This greatly helps the air conditioning system to keep the quality of your interior decor.

Unit size has also been made more compact, slashing installation space and also facilitating concealed use in buildings where exposed format units have been the rule in the past.

### Dimension

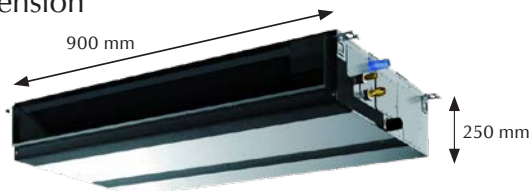

PEY-M50/60JAL



PEY-M50/60/71JAL

## Wider Selection of Fan Speed and Static Pressure Level

Three fan speeds (Low-Mid-High) and five static pressure levels (35-50-70-100-125Pa) are available by using the DC fan motor to meet various application needs.

Indoor			PEY-M50JAL	PEY-M60JAL	PEY-M71JAL
Rated Capacity (Min-Max)**	kW		5.0 (1.5-5.8)	6.0 (1.6-6.7)	7.1 (1.7-8.5)
Power Input	kW		0.11		0.17
Max Running Current	A		1.39		1.97
Airflow Rate (Lo-Mid-High)	CMM (m <sup>3</sup> /min)		12.0-14.5-17.0		17.5-21.0-25.0
Sound Level (Lo-Mid-High)*	dB(A)		30-35-39		30-34-39
Dimension (W X D X H)	mm		900 X 732 X 250		1100 X 732 X 250
Net Weight	kg		27.0		30.5
External Piping	Diameter	Gas (ø)	mm	12.70	15.88
		Liquid (ø)	mm	6.35	9.52
Static Pressure	Pa		35-50-70-100-125		

\*Note: sound level is measure in anechoic chambers (based on 50Pa) \*\*Varies according to connected CU model  
Total indoor running current must not exceed 3 Amps when connecting PEY-M indoor units with MXY-H series



# SEZ Series

Compact type fits neatly into lowered ceiling, achieving stringent economy in all aspects of air conditioning.




## Compact Ceiling Concealed Units

Only the intake-air grille and outlet vents are visible when using this ceiling concealed indoor unit. The rest of the unit is conveniently hidden in the ceiling cavity, essentially leaving the ceiling and walls free of bulky looking devices and maintaining a high-class interior décor.

The compact units require minimal space and can be installed in buildings with lowered ceilings, where exposed units were the rule in the past.


### Dimension

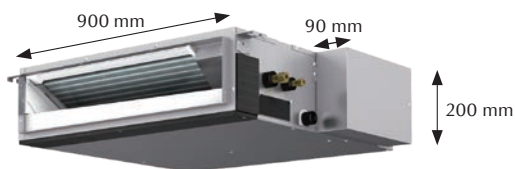

SEZ-M35/50DAL



SEZ-M35/50/71 DAL

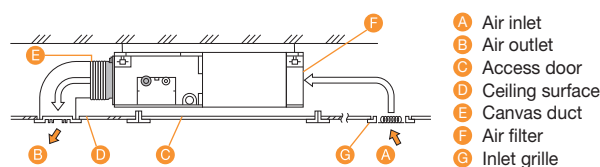

## Wide Selection of Fan Speed and Static Pressure Level

Three fan speeds (Low - Med - Hi) and four static pressure levels (5 - 15 - 35 - 50Pa) are available by using the DC fan motor to meet various needs.

## Drain Pump (Optional)

The PAC-KE07DM-E drain pump is now available as an option. With the pump, a drain hose length of up to 550mm can be used, leading to increased installation possibilities.

Indoor			SEZ-M35DAL	SEZ-M50DAL	SEZ-M71DAL	
Rated Capacity (Min-Max)**		kW	3.5 (1.4-4.3)	5.0 (1.5-5.8)	7.1 (1.7-8.5)	
Power Input		kW	0.05	0.07	0.10	
Max Running Current		A	0.46	0.63	0.84	
Airflow Rate (Lo-Mid-High)		CMM (m³/min)	7.0-9.0-11.0	10.0-12.5-15.0	12.0-16.0-20.0	
Sound Level (Lo-Mid-High)*		dB(A)	23-28-33	30-34-37	30-35-40	
Dimension (W X D X H)		mm	990 × 700 × 200		1190 × 700 × 200	
Net Weight		kg	21	22	25.5	
External Piping	Diameter	Gas (ø)	mm	9.52	12.70	15.88
		Liquid (ø)	mm	6.35		9.52
Static Pressure		Pa	5-15-35-50			

\*Note: sound level is measure in anechoic chambers (based on 15Pa)

\*\*Varies according to connected CU model

Mr. SLIM



# Inverter Single Split System

Our Inverter Technology adjusts capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.



## PLY Series

### Indoor Unit



**PLY-M60EA#**  
Cooling Capacity: 6.0kW

Dimensions (W X D X H) :  
840 X 840 X 258 mm



**PLY-ZM50EA#**  
Cooling capacity: 5.1kW

Dimensions (W X D X H) :  
840 X 840 X 298 mm

**PLY-M80EA#**  
Cooling Capacity: 7.6kW

**PLY-M100EA#**  
Cooling Capacity: 9.5kW

**PLY-M125EA#**  
Cooling Capacity: 11.4kW



### Outdoor Unit



**SUY-ZM50VA/M60VA**  
Dimensions (W X D X H) :  
800 X 285 X 714 mm



**SUY-M80VA/M100VA**  
Dimensions (W X D X H) :  
840 X 330 X 880 mm



**PUY-M125VKA**  
Dimensions (W X D X H) :  
1050 X 330 X 981 mm

## Mr Slim Inverter Ceiling Cassette Type PLY Series

Model		PLY-ZM50EA	PLY-M60EA	PLY-M80EA	PLY-M100EA	PLY-M125EA
Indoor		PLY-ZM50EA	PLY-M60EA	PLY-M80EA	PLY-M100EA	PLY-M125EA
Outdoor		SUY-ZM50VA	SUY-M60VA	SUY-M80VA	SUY-M100VA	PUY-M125VKA
Function & type		Cooling, Ceiling Cassette				
Capacity (Rated/Max)	kW	5.1 (5.7)	6.0 (6.5)	7.6 (8.9)	9.5 (11.3)	11.4 (14.0)
Power Input	kW	1.03	1.37	1.76	2.51	3.02
Running Current	A	4.80	6.30	8.10	11.60	13.70
Airflow	CMM(m <sup>3</sup> /min)	14-17-20-23	16-18-20-23	17-21-25-29	21-25-28-32	26-29-32-34
Dimension (W X D X H)	Indoor	mm	840 x 840 x 298	840 x 840 x 258	840 X 840 X 298	
	Outdoor	mm	800 x 285 x 714		840 X 330 X 880	1050 X 330 X 981
Net Weight	Indoor	kg	27	21	24	27
	Outdoor	kg	35		43	63
Indoor Sound level *	(Silent - High)	dB(A)	23-27-31-35	28-31-34-37	27-32-37-41	32-37-41-44
Outdoor Sound Level *		dB(A)	48		54	55
Connection method	Indoor/Outdoor	Flared				
External Piping	Diameter	Gas (ø)	mm			
		Liquid (ø)	mm			
Heat Exchanger**		Multiflow Condenser (MFC)				
Piping Length	Max. Length ***	m	20 <sup>^</sup>	30		50
	Max. Height	m	12		15	30
Power Supply	V, Phase, Hz	230, 1, 50				
Pre-charged Refrigerant Quantity (Max)	kg	1.01 (1.01)	0.85 (0.85)	0.96 (0.96)	1.06 (1.06)	1.20 (1.20)
Energy labelling scheme						

\*Note: Sound level is measured in anechoic chambers.

\*\* Only applicable to outdoor unit.

\*\*\*Refrigerant recovery equipment is required for pump down operation for piping exceeding 20m.

# Kindly discuss with your installer on the placement of Climate Friendly Refrigerant label

^ For piping above 20m, please contact sales representatives

Conversion formula: Btu/h=kW x 3412

Mr.SLIM



# Inverter Single Split System



Our Inverter Technology adjusts capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.

## PEY Series

### Indoor Unit



Dimensions (W X D X H) :  
900 X 732 X 250 mm

PEY-M50JAL2#  
Cooling capacity: 5.0kW  
PEY-M60JAL2#  
Cooling capacity: 6.0kW



Dimensions (W X D X H) :  
1100 X 732 X 250 mm

PEY-M80JAL2#  
Cooling capacity: 8.0kW



Dimensions (W X D X H) :  
1400 X 732 X 250 mm

PEY-M100JAL2#  
Cooling capacity: 10.0kW  
PEY-M125JAL2#  
Cooling capacity: 12.5kW



### Outdoor Unit



SUY-ZM50VA/M60VA  
Dimensions (W X D X H) :  
800 X 285 X 714 mm



SUY-M80VA/M100VA  
Dimensions (W X D X H) :  
840 X 330 X 880 mm



PUY-M125VKA  
Dimensions (W X D X H) :  
1050 X 330 X 981 mm

## Mr Slim Inverter Ceiling-Concealed Type PEY Series

Model			PEY-M50JAL2	PEY-M60JAL2	PEY-M80JAL2	PEY-M100JAL2	PEY-M125JAL2	
Indoor			PEY-M50JAL2	PEY-M60JAL2	PEY-M80JAL2	PEY-M100JAL2	PEY-M125JAL2	
Outdoor			SUY-ZM50VA	SUY-M60VA	SUY-M80VA	SUY-M100VA	PUY-M125VKA	
Function & type			Cooling, Ceiling Concealed					
Capacity (Rated/Max)	kW		5.0 (5.7)	6.0 (6.5)	8.0 (8.9)	10.0 (11.3)	12.5 (14.0)	
Power Input	kW		1.43	1.89	2.15	3.20	4.05	
Running Current	A		6.6	8.6	9.7	14.5	18.2	
Airflow	CMM(m <sup>3</sup> /min)		12.0-14.5-17.0		17.5-21.0-25.0	29.5-35.5-42.0		
Dimension (W X D X H)	Indoor	mm	900 x 732 x 250		1100 x 732 x 250	1400 x 732 x 250		
	Outdoor	mm	800 x 285 x 714		840 X 330 X 880		1050 x 330 x 981	
Net Weight	Indoor	kg	27		30	39		
	Outdoor	kg	35		43		63	
Indoor Sound level *	(Silent - High)	dB(A)	28-32-36		29-33-37	36-40-44		
Outdoor Sound Level *		dB(A)	48		54	55		
Connection method	Indoor/Outdoor		Flared					
External Piping	Diameter	Gas (ø)	mm		15.88			
		Liquid (ø)	mm		9.52			
Heat Exchanger**			Multiflow Condenser (MFC)					
Piping Length	Max. Length***	m	20^		30	50		
	Max. Height	m	12		15	30		
Power Supply	V, Phase, Hz		230, 1, 50					
Pre-charged Refrigerant Quantity (Max)	kg		1.01 (1.01)	0.85 (0.85)	0.96 (0.96)	1.06 (1.06)	1.20 (1.20)	

\*Note: Sound level is measured in anechoic chambers.

\*\* Only applicable to outdoor unit.

\*\*\*Refrigerant recovery equipment is required for pump down operation for piping exceeding 20m.

# Kindly discuss with your installer on the placement of Climate Friendly Refrigerant label

^ For piping above 20m, please contact sales representatives

Conversion formula: Btu/h=kW x 3412



Mr. SLIM



# Inverter Single Split System

Our Inverter Technology adjusts capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.



## PCY Series

### Indoor Unit



PCY-M125KAL

Cooling capacity: 11.4kW  
Dimensions (W X D X H) : 1600 X 680 X 230 mm



### Outdoor Unit



PUY-M125VKA

Dimensions (W X D X H) : 1050 X 330 X 981 mm

## Mr Slim Inverter Ceiling-Suspended Type PCY Series

Model			
Indoor		PCY-M125KAL	
Outdoor		PUY-M125VKA	
Function & type		Cooling, Ceiling Suspended	
Capacity (Max)		kW	
Power Input		kW	
Running Current		A	
Airflow		CMM(m <sup>3</sup> /min)	
Dimension (W X D X H)	Indoor	mm	1600 x 680 x 230
	Outdoor	mm	1050 x 330 x 981
Net Weight	Indoor	kg	40
	Outdoor	kg	63
Indoor Sound level *	(Silent - High)	dB(A)	42-44-46-48
Outdoor Sound Level *		dB(A)	55
Connection method	Indoor/Outdoor		Flared
External Piping	Diameter	Gas (ø)	mm
		Liquid (ø)	mm
Heat Exchanger**		Multiflow Condenser (MFC)	
Piping Length	Max. Length***	m	50
	Max. Height	m	30
Power Supply		V, Phase, Hz	230, 1, 50
Pre-charged Refrigerant Quantity (Max)		kg	1.20 (1.20)
Energy labelling scheme			

\*Note: Sound level is measured in anechoic chambers.

\*\* Only applicable to outdoor unit.

\*\*\*Refrigerant recovery equipment is required for pump down operation for piping exceeding 20m.

Conversion formula: Btu/h=kW x 3412



Inverter Multi Split System MXY Series (For private dwellings & HDB flats without current limitation)

Outdoor Unit	Indoor Unit combination		Capacity of each indoor unit (kW)				Total capacity (kW)			Total power input (kW)			Total running current (A)			
	(A + B)		A	B	C	D	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	
MXY-3H28VG	1 Room	10	2.80	-	-	-	2.80	1.40	3.80	0.62	0.38	0.90	2.75	1.69	3.99	
		13	3.50	-	-	-	3.50	1.40	4.30	0.81	0.40	1.00	3.59	1.77	4.44	
		18	5.00	-	-	-	5.00	1.50	5.30	1.20	0.43	1.56	5.32	1.91	6.92	
		20	5.70	-	-	-	5.70	1.60	6.60	1.59	0.47	2.20	7.05	2.09	9.76	
		24	5.70	-	-	-	5.70	1.70	7.50	1.61	0.48	2.66	7.14	2.13	11.80	
	2 Room	10+10	2.80	2.80	-	-	5.60	2.00	7.00	1.39	0.48	2.16	6.17	2.13	9.58	
		10+13	2.62	3.28	-	-	5.90	2.00	7.20	1.40	0.48	2.36	6.21	2.13	10.47	
		10+18	2.23	3.97	-	-	6.20	2.00	7.60	1.41	0.48	2.63	6.26	2.13	11.65	
		10+20	1.97	4.23	-	-	6.20	2.00	7.80	1.42	0.48	2.71	6.30	2.13	12.00	
		10+24	1.75	4.45	-	-	6.20	2.00	8.00	1.44	0.48	2.79	6.39	2.13	12.38	
		13+13	3.10	3.10	-	-	6.20	2.00	7.40	1.40	0.48	2.56	6.21	2.13	11.36	
		13+18	2.55	3.65	-	-	6.20	2.00	7.70	1.42	0.48	2.68	6.30	2.13	11.89	
		13+20	2.28	3.92	-	-	6.20	2.00	7.90	1.43	0.48	2.76	6.34	2.13	12.24	
		13+24	2.05	4.15	-	-	6.20	2.00	8.10	1.43	0.48	2.82	6.34	2.13	12.49	
		18+18	3.10	3.10	-	-	6.20	2.00	8.00	1.44	0.48	2.80	6.39	2.13	12.42	
	18+20	2.82	3.38	-	-	6.20	2.00	8.10	1.42	0.48	2.83	6.30	2.13	12.53		
	3 Room	10+10+10	2.07	2.07	2.07	-	6.20	2.40	8.80	1.16	0.48	2.86	5.15	2.13	12.69	
		10+10+13	1.91	1.91	2.38	-	6.20	2.40	8.80	1.15	0.48	2.86	5.10	2.13	12.67	
		10+10+18	1.64	1.64	2.92	-	6.20	2.40	8.90	1.12	0.48	2.84	4.97	2.13	12.60	
		10+10+20	1.57	1.57	3.36	-	6.50	2.40	8.90	1.33	0.48	2.84	5.90	2.13	12.60	
		10+13+13	1.77	2.21	2.21	-	6.20	2.40	8.90	1.13	0.48	2.85	5.01	2.13	12.62	
		10+13+18	1.54	1.92	2.74	-	6.20	2.40	8.90	1.12	0.48	2.84	4.97	2.13	12.60	
		10+20+20	1.17	2.51	2.51	-	6.20	2.40	8.90	1.11	0.48	2.85	4.92	2.13	12.62	
	13+13+13	2.07	2.07	2.07	-	6.20	2.40	8.90	1.12	0.48	2.84	4.97	2.13	12.60		
	MXY-4H33VG	1 Room	10	2.80	-	-	-	2.80	1.40	3.80	0.62	0.38	0.90	2.78	1.70	4.03
			13	3.50	-	-	-	3.50	1.40	4.30	0.82	0.40	1.05	3.68	1.79	4.71
			18	5.00	-	-	-	5.00	1.50	5.30	1.26	0.43	1.68	5.65	1.93	7.53
20			6.00	-	-	-	6.00	1.60	6.60	1.72	0.47	2.20	7.71	2.11	9.86	
24			6.20	-	-	-	6.20	1.70	7.50	1.82	0.48	2.80	8.16	2.15	12.55	
2 Room		10+10	2.80	2.80	-	-	5.60	2.00	7.00	1.39	0.55	2.14	6.23	2.44	9.59	
		10+13	2.71	3.39	-	-	6.10	2.00	7.20	1.52	0.55	2.35	6.81	2.44	10.51	
		10+18	2.33	4.17	-	-	6.50	2.00	7.60	1.67	0.55	2.61	7.49	2.44	11.70	
		10+20	2.07	4.43	-	-	6.50	2.00	7.80	1.70	0.55	2.68	7.62	2.44	12.01	
		10+24	1.84	4.66	-	-	6.50	2.00	8.00	1.73	0.55	2.77	7.75	2.44	12.39	
		13+13	3.25	3.25	-	-	6.50	2.00	7.40	1.65	0.55	2.55	7.40	2.44	11.43	
		13+18	2.68	3.82	-	-	6.50	2.00	7.70	1.69	0.55	2.66	7.58	2.44	11.92	
		13+20	2.39	4.11	-	-	6.50	2.00	7.90	1.72	0.55	2.74	7.71	2.44	12.26	
		13+24	2.15	4.35	-	-	6.50	2.00	8.10	1.71	0.55	2.80	7.66	2.44	12.53	
		18+18	3.25	3.25	-	-	6.50	2.00	8.00	1.73	0.55	2.77	7.75	2.44	12.42	
18+20		2.95	3.55	-	-	6.50	2.00	8.10	1.70	0.55	2.81	7.62	2.44	12.60		
18+24		2.69	3.81	-	-	6.50	2.00	8.20	1.67	0.55	2.86	7.49	2.44	12.80		
20+20		3.25	3.25	-	-	6.50	2.00	8.20	1.67	0.55	2.85	7.49	2.44	12.77		
20+24		2.98	3.52	-	-	6.50	2.00	8.30	1.67	0.55	2.90	7.49	2.44	13.00		
3 Room		10+10+10	2.17	2.17	2.17	-	6.50	2.50	8.80	1.46	0.55	2.82	6.54	2.44	12.62	
		10+10+13	2.00	2.00	2.50	-	6.50	2.50	8.80	1.45	0.55	2.82	6.50	2.44	12.62	
		10+10+18	1.72	1.72	3.07	-	6.50	2.50	8.90	1.44	0.55	2.81	6.45	2.44	12.60	
		10+10+20	1.57	1.57	3.36	-	6.50	2.50	8.90	1.44	0.55	2.81	6.45	2.44	12.57	
		10+10+24	1.43	1.43	3.63	-	6.50	2.50	8.90	1.43	0.55	2.80	6.41	2.44	12.55	
		10+13+13	1.86	2.32	2.32	-	6.50	2.50	8.90	1.45	0.55	2.82	6.50	2.44	12.62	
		10+13+18	1.61	2.01	2.88	-	6.50	2.50	8.90	1.44	0.55	2.81	6.45	2.44	12.57	
		10+13+20	1.48	1.85	3.17	-	6.50	2.50	8.90	1.43	0.55	2.80	6.41	2.44	12.55	
	10+13+24	1.36	1.70	3.44	-	6.50	2.50	8.90	1.43	0.55	2.80	6.41	2.44	12.53		
	10+18+18	1.42	2.54	2.54	-	6.50	2.50	8.90	1.43	0.55	2.80	6.41	2.44	12.55		
	10+18+20	1.32	2.36	2.83	-	6.50	2.50	8.90	1.43	0.55	2.80	6.41	2.44	12.53		
	10+18+24	1.22	2.18	3.10	-	6.50	2.50	8.90	1.42	0.55	2.79	6.36	2.44	12.51		
	10+20+20	1.23	2.64	2.64	-	6.50	2.50	8.90	1.42	0.55	2.79	6.36	2.44	12.51		
	13+13+13	2.17	2.17	2.17	-	6.50	2.50	8.90	1.44	0.55	2.81	6.45	2.44	12.60		
	13+13+18	1.90	1.90	2.71	-	6.50	2.50	8.90	1.43	0.55	2.81	6.41	2.44	12.57		
	13+13+20	1.75	1.75	3.00	-	6.50	2.50	8.90	1.43	0.55	2.80	6.41	2.44	12.55		
	13+13+24	1.61	1.61	3.27	-	6.50	2.50	8.90	1.42	0.55	2.80	6.36	2.44	12.53		
	13+18+18	1.69	2.41	2.41	-	6.50	2.50	8.90	1.43	0.55	2.80	6.41	2.44	12.53		
	13+18+20	1.57	2.24	2.69	-	6.50	2.50	8.90	1.42	0.55	2.79	6.36	2.44	12.51		
	13+18+24	1.46	2.08	2.96	-	6.50	2.50	8.90	1.42	0.55	2.79	6.36	2.44	12.48		
13+20+20	1.47	2.52	2.52	-	6.50	2.50	8.90	1.42	0.55	2.79	6.36	2.44	12.48			
18+18+18	2.17	2.17	2.17	-	6.50	2.50	8.90	1.42	0.55	2.79	6.36	2.44	12.51			
18+18+20	2.03	2.03	2.44	-	6.50	2.50	8.90	1.41	0.55	2.79	6.32	2.44	12.48			
18+18+24	1.90	1.90	2.70	-	6.50	2.50	8.90	1.41	0.55	2.78	6.32	2.44	12.44			
18+20+20	1.91	2.29	2.29	-	6.50	2.50	8.90	1.41	0.55	2.78	6.32	2.44	12.44			
4 Room	10+10+10+10	1.63	1.63	1.63	1.63	6.50	2.60	9.00	1.30	0.55	2.85	5.83	2.44	12.77		
	10+10+10+13	1.53	1.53	1.53	1.91	6.50	2.60	9.00	1.30	0.55	2.84	5.83	2.44	12.73		
	10+10+10+18	1.36	1.36	1.36	2.43	6.50	2.60	9.00	1.30	0.55	2.82	5.83	2.44	12.64		
	10+10+10+20	1.26	1.26	1.26	2.71	6.50	2.60	9.00	1.30	0.55	2.89	5.83	2.44	12.93		
	10+10+10+24	1.17	1.17	1.17	2.98	6.50	2.60	9.00	1.30	0.55	3.10	5.83	2.44	13.87		
	10+10+13+13	1.44	1.44	1.81	1.81	6.50	2.60	9.00	1.30	0.55	2.83	5.83	2.44	12.68		
	10+10+13+18	1.29	1.29	1.61	2.30	6.50	2.60	9.00	1.30	0.55	2.83	5.83	2.44	12.68		
	10+10+13+20	1.21	1.21	1.51	2.58	6.50	2.60	9.20	1.30	0.55	3.02	5.83	2.44	13.51		
	10+10+13+24	1.12	1.12	1.40	2.85	6.50	2.60	9.60	1.30	0.55	3.23	5.83	2.44	14.46		
	10+10+18+18	1.17	1.17	2.08	2.08	6.50	2.60	9.40	1.30	0.55	3.11	5.83	2.44	13.94		
	10+10+18+20	1.10	1.10	1.96	2.35	6.50	2.60	9.70	1.30	0.55	3.30	5.83	2.44	14.79		
	10+10+20+20	1.10	1.10	2.35	2.35	6.90	2.60	10.70	1.42	0.55	4.00	6.36	2.44	17.93		
	10+13+13+13	1.37	1.71	1.71	1.71	6.50	2.60	8.90	1.30	0.55	2.82	5.83	2.44	12.64		
	10+13+13+18	1.23	1.54	1.54	2.20	6.50	2.60	9.								



Inverter Multi Split System MXY Series (For private dwellings & HDB flats without current limitation)

Outdoor Unit	Indoor Unit combination		Capacity of each indoor unit (kW)				Total capacity (kW)			Total power input (kW)			Total running current (A)			
	(A + B)		A	B	C	D	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	
MXY-4H38VG	1 Room	10	2.80	-	-	-	2.80	1.40	3.80	0.62	0.43	0.90	2.75	1.91	3.99	
		13	3.50	-	-	-	3.50	1.40	4.30	0.81	0.43	1.00	3.59	1.91	4.44	
		18	5.00	-	-	-	5.00	1.60	5.80	1.23	0.47	1.73	5.46	2.09	7.68	
		20	6.00	-	-	-	6.00	1.60	6.70	1.72	0.47	2.20	7.63	2.09	9.76	
		24	7.00	-	-	-	7.00	1.60	8.50	2.45	0.47	3.40	10.87	2.09	15.08	
	2 Room	10+10	2.80	2.80	-	-	-	5.60	2.00	7.50	1.46	0.59	2.61	6.48	2.60	11.58
		10+13	2.80	3.50	-	-	-	6.30	2.00	8.20	1.81	0.59	2.92	8.03	2.60	12.93
		10+18	2.51	4.49	-	-	-	7.00	2.00	8.90	2.13	0.59	3.23	9.45	2.60	14.33
		10+20	2.23	4.77	-	-	-	7.00	2.00	8.90	2.08	0.59	3.24	9.23	2.60	14.37
		10+24	1.98	5.02	-	-	-	7.00	2.00	9.00	2.03	0.59	3.25	9.01	2.60	14.42
		13+13	3.50	3.50	-	-	-	7.00	2.00	8.80	2.16	0.59	3.22	9.58	2.60	14.29
		13+18	2.88	4.12	-	-	-	7.00	2.00	8.90	2.10	0.59	3.24	9.32	2.60	14.35
		13+20	2.58	4.42	-	-	-	7.00	2.00	9.00	2.05	0.59	3.25	9.09	2.60	14.40
		13+24	2.31	4.69	-	-	-	7.00	2.00	9.10	2.01	0.59	3.13	8.92	2.60	13.89
		18+18	3.50	3.50	-	-	-	7.00	2.00	9.00	2.03	0.59	3.25	9.01	2.60	14.42
		18+20	3.18	3.82	-	-	-	7.00	2.10	9.10	1.99	0.59	3.05	8.83	2.60	13.53
		18+24	2.89	4.11	-	-	-	7.00	2.10	9.20	1.95	0.59	2.85	8.65	2.60	12.64
		20+20	3.50	3.50	-	-	-	7.00	2.10	9.20	1.95	0.59	2.85	8.65	2.60	12.64
		20+24	3.21	3.79	-	-	-	7.00	2.10	9.20	1.95	0.59	2.85	8.65	2.60	12.64
		3 Room	10+10+10	2.53	2.53	2.53	-	-	7.60	2.50	10.00	1.78	0.59	3.35	7.90	2.60
	10+10+13		2.34	2.34	2.92	-	-	7.60	2.50	10.20	1.76	0.59	3.35	7.81	2.60	14.86
	10+10+18		2.01	2.01	3.58	-	-	7.60	2.50	10.60	1.73	0.59	3.35	7.68	2.60	14.86
	10+10+20		1.83	1.83	3.93	-	-	7.60	2.50	10.60	1.72	0.59	3.35	7.63	2.60	14.86
	10+10+24		1.68	1.68	4.25	-	-	7.60	2.50	10.70	1.72	0.59	3.35	7.63	2.60	14.86
	10+13+13		2.17	2.71	2.71	-	-	7.60	2.50	10.40	1.75	0.59	3.35	7.76	2.60	14.86
	10+13+18		1.88	2.35	3.36	-	-	7.60	2.50	10.60	1.72	0.59	3.35	7.63	2.60	14.86
	10+13+20		1.73	2.16	3.71	-	-	7.60	2.50	10.70	1.72	0.59	3.35	7.63	2.60	14.86
	10+13+24		1.59	1.99	4.03	-	-	7.60	2.50	10.70	1.71	0.59	3.35	7.59	2.60	14.86
	10+18+18		1.66	2.97	2.97	-	-	7.60	2.50	10.70	1.71	0.59	3.35	7.59	2.60	14.86
	10+18+20		1.54	2.75	3.30	-	-	7.60	2.50	10.70	1.71	0.59	3.35	7.59	2.60	14.86
	10+18+24		1.43	2.55	3.62	-	-	7.60	2.50	10.80	1.70	0.59	3.35	7.54	2.60	14.86
	10+20+20		1.44	3.08	3.08	-	-	7.60	2.50	10.80	1.70	0.59	3.35	7.54	2.60	14.86
	13+13+13		2.53	2.53	2.53	-	-	7.60	2.50	10.60	1.73	0.59	3.35	7.68	2.60	14.86
	13+13+18		2.22	2.22	3.17	-	-	7.60	2.50	10.70	1.72	0.59	3.35	7.63	2.60	14.86
	13+13+20		2.05	2.05	3.51	-	-	7.60	2.50	10.70	1.71	0.59	3.35	7.59	2.60	14.86
	13+13+24		1.89	1.89	3.83	-	-	7.60	2.50	10.80	1.71	0.59	3.35	7.59	2.60	14.86
	13+18+18		1.97	2.81	2.81	-	-	7.60	2.50	10.70	1.71	0.59	3.35	7.59	2.60	14.86
	13+18+20		1.83	2.62	3.14	-	-	7.60	2.50	10.80	1.70	0.59	3.35	7.54	2.60	14.86
	13+18+24		1.71	2.44	3.46	-	-	7.60	2.50	10.80	1.68	0.59	3.35	7.45	2.60	14.86
	13+20+20		1.72	2.94	2.94	-	-	7.60	2.50	10.80	1.69	0.59	3.35	7.50	2.60	14.86
	18+18+18		2.53	2.53	2.53	-	-	7.60	2.50	10.80	1.70	0.59	3.35	7.54	2.60	14.86
	18+18+20		2.38	2.38	2.85	-	-	7.60	2.50	10.80	1.67	0.59	3.35	7.41	2.60	14.86
	18+18+24		2.22	2.22	3.16	-	-	7.60	2.50	10.80	1.64	0.59	3.35	7.28	2.60	14.86
	18+20+20		2.24	2.68	2.68	-	-	7.60	2.50	10.80	1.65	0.59	3.35	7.32	2.60	14.86
	4 Room	10+10+10+10	1.90	1.90	1.90	1.90	-	7.60	3.00	11.60	1.40	0.59	3.79	6.21	2.60	16.81
		10+10+10+13	1.79	1.79	1.79	2.24	-	7.60	3.00	11.60	1.40	0.59	3.71	6.21	2.60	16.44
		10+10+10+18	1.59	1.59	1.59	2.84	-	7.60	3.00	11.60	1.39	0.59	3.52	6.17	2.60	15.59
		10+10+10+20	1.48	1.48	1.48	3.17	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26
		10+10+10+24	1.37	1.37	1.37	3.48	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26
		10+10+13+13	1.69	1.69	2.11	2.11	-	7.60	3.00	11.60	1.40	0.59	3.62	6.21	2.60	16.04
10+10+13+18		1.51	1.51	1.89	2.70	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
10+10+13+20		1.41	1.41	1.76	3.02	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
10+10+13+24		1.31	1.31	1.64	3.33	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
10+10+18+18		1.36	1.36	2.44	2.44	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
10+10+18+20		1.28	1.28	2.29	2.75	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
10+10+20+20		1.27	1.27	2.73	2.73	-	8.00	3.00	11.60	1.62	0.59	3.44	7.19	2.60	15.26	
10+13+13+13		1.60	2.00	2.00	2.00	-	7.60	3.00	11.60	1.39	0.59	3.53	6.17	2.60	15.66	
10+13+13+18		1.44	1.80	1.80	2.57	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
10+13+13+20		1.35	1.68	1.68	2.89	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
10+13+13+24		1.26	1.57	1.57	3.19	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
10+13+18+18		1.31	1.63	2.33	2.33	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
10+13+18+20		1.23	1.54	2.20	2.64	-	7.60	3.00	11.60	1.38	0.59	3.44	6.12	2.60	15.26	
13+13+13+13		1.90	1.90	1.90	1.90	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
13+13+13+18		1.72	1.72	1.72	2.45	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
13+13+13+20		1.61	1.61	1.61	2.76	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
13+13+13+24		1.51	1.51	1.51	3.07	-	7.60	3.00	11.60	1.38	0.59	3.44	6.12	2.60	15.26	
13+13+18+18		1.56	1.56	2.24	2.24	-	7.60	3.00	11.60	1.39	0.59	3.44	6.17	2.60	15.26	
MXY-2H20VF		1 Room	10	2.80	-	-	-	2.80	1.40	3.80	0.60	0.25	0.84	3.22	1.34	4.51
			13	3.50	-	-	-	3.50	1.40	4.30	0.79	0.25	1.05	4.24	1.34	5.64
	18		4.50	-	-	-	4.50	1.50	5.00	1.20	0.26	1.60	6.44	1.40	8.59	
	20		4.50	-	-	-	4.50	1.60	6.00	1.18	0.27	1.92	6.33	1.45	10.31	
	24		4.50	-	-	-	4.50	1.60	6.70	1.18	0.27	2.20	7.63	1.45	12.13	
	2 Room	10+10	2.00	2.00	-	-	-	4.00	1.50	6.30	0.81	0.32	2.26	4.35	1.72	12.13
		10+13	1.82	2.28	-	-	-	4.10	1.50	6.40	0.82	0.33	2.26	4.40	1.77	12.13
		10+18	1.47	2.63	-	-	-	4.10	1.60	6.40	0.83	0.33	2.26	4.46	1.77	12.13
		10+20	1.34	2.86	-	-	-	4.20	1.60	6.50	0.84	0.34	2.26	4.51	1.83	12.13
		13+13	2.05	2.05	-	-	-	4.10	1.50	6.40	0.83	0.33	2.26	4.46	1.77	12.13
		13+18	1.73	2.47	-	-	-	4.20	1.60	6.50	0.84	0.34	2.26	4.51		





Inverter Multi Split System MXY Series (For HDB flats with current limitation 8.5A)


Outdoor Unit	Indoor Unit combination		Capacity of each indoor unit (kW)				Total capacity (kW)			Total power input (kW)			Total running current (A)		
	(A + B)		A	B	C	D	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.
MXY-3H28VG (8.5A)	1 Room	10	2.80	-	-	-	2.80	1.40	3.80	0.62	0.38	0.90	2.75	1.69	3.99
		13	3.50	-	-	-	3.50	1.40	4.30	0.81	0.40	1.00	3.59	1.77	4.44
		18	5.00	-	-	-	5.00	1.50	5.30	1.20	0.43	1.56	5.32	1.91	6.92
		20	5.70	-	-	-	5.70	1.60	6.40	1.54	0.47	1.92	6.83	2.09	8.50
		24	5.70	-	-	-	5.70	1.70	6.60	1.61	0.48	1.92	7.14	2.13	8.50
	2 Room	10+10	2.80	2.80	-	-	5.60	2.00	6.40	1.39	0.48	1.92	6.17	2.13	8.50
		10+13	2.62	3.28	-	-	5.90	2.00	6.50	1.40	0.48	1.92	6.21	2.13	8.50
		10+18	2.23	3.97	-	-	6.20	2.00	6.50	1.43	0.48	1.92	6.34	2.13	8.50
		10+20	1.97	4.23	-	-	6.20	2.00	6.50	1.44	0.48	1.92	6.39	2.13	8.50
		10+24	1.75	4.45	-	-	6.20	2.00	6.50	1.46	0.48	1.92	6.48	2.13	8.50
		13+13	3.10	3.10	-	-	6.20	2.00	6.50	1.40	0.48	1.92	6.21	2.13	8.50
		13+18	2.55	3.65	-	-	6.20	2.00	6.50	1.44	0.48	1.92	6.39	2.13	8.50
		13+20	2.28	3.92	-	-	6.20	2.00	6.50	1.45	0.48	1.92	6.43	2.13	8.50
		13+24	2.05	4.15	-	-	6.20	2.00	6.60	1.45	0.48	1.92	6.43	2.13	8.50
		18+18	3.10	3.10	-	-	6.20	2.00	6.50	1.44	0.48	1.92	6.39	2.13	8.50
	18+20	2.82	3.38	-	-	6.20	2.00	6.60	1.44	0.48	1.92	6.39	2.13	8.50	
	3 Room	10+10+10	2.07	2.07	2.07	-	6.20	2.40	7.10	1.16	0.48	1.92	5.15	2.13	8.50
		10+10+13	1.91	1.91	2.38	-	6.20	2.40	7.10	1.16	0.48	1.92	5.15	2.13	8.50
		10+10+18	1.64	1.64	2.92	-	6.20	2.40	7.20	1.14	0.48	1.92	5.06	2.13	8.50
		10+10+20	1.57	1.57	3.36	-	6.50	2.40	7.20	1.33	0.48	1.92	5.90	2.13	8.50
		10+13+13	1.77	2.21	2.21	-	6.20	2.40	7.20	1.15	0.48	1.92	5.10	2.13	8.50
		10+13+18	1.54	1.92	2.74	-	6.20	2.40	7.20	1.14	0.48	1.92	5.06	2.13	8.50
		13+13+13	2.07	2.07	2.07	-	6.20	2.40	7.20	1.12	0.48	1.92	4.97	2.13	8.50
	MXY-4H33VG (8.5 A)	1 Room	10	2.80	-	-	-	2.80	1.40	3.80	0.62	0.38	0.90	2.78	1.70
13			3.50	-	-	-	3.50	1.40	4.30	0.82	0.40	1.05	3.68	1.79	4.71
18			5.00	-	-	-	5.00	1.50	5.30	1.26	0.43	1.68	5.65	1.93	7.53
20			6.00	-	-	-	6.00	1.60	6.40	1.72	0.47	1.90	7.71	2.11	8.50
24			6.20	-	-	-	6.20	1.70	6.60	1.82	0.48	1.90	8.16	2.15	8.50
2 Room		10+10	2.80	2.80	-	-	5.60	2.10	6.40	1.39	0.55	1.90	6.23	2.44	8.50
		10+13	2.71	3.39	-	-	6.10	2.10	6.50	1.52	0.55	1.90	6.81	2.44	8.50
		10+18	2.33	4.17	-	-	6.50	2.10	6.50	1.67	0.55	1.90	7.49	2.44	8.50
		10+20	2.07	4.43	-	-	6.50	2.10	6.50	1.70	0.55	1.90	7.62	2.44	8.50
		10+24	1.84	4.66	-	-	6.50	2.10	6.50	1.73	0.55	1.90	7.75	2.44	8.50
		13+13	3.25	3.25	-	-	6.50	2.10	6.50	1.65	0.55	1.90	7.40	2.44	8.50
		13+18	2.68	3.82	-	-	6.50	2.10	6.50	1.69	0.55	1.90	7.58	2.44	8.50
		13+20	2.39	4.11	-	-	6.50	2.10	6.50	1.72	0.55	1.90	7.71	2.44	8.50
		13+24	2.15	4.35	-	-	6.50	2.10	6.60	1.71	0.55	1.90	7.66	2.44	8.50
		18+18	3.25	3.25	-	-	6.50	2.10	6.50	1.73	0.55	1.90	7.75	2.44	8.50
3 Room		18+20	2.95	3.55	-	-	6.50	2.10	6.60	1.70	0.55	1.90	7.62	2.44	8.50
		18+24	2.69	3.81	-	-	6.50	2.10	6.70	1.67	0.55	1.90	7.49	2.44	8.50
		20+20	3.25	3.25	-	-	6.50	2.10	6.70	1.67	0.55	1.90	7.49	2.44	8.50
		20+24	2.98	3.52	-	-	6.50	2.10	6.70	1.67	0.55	1.90	7.49	2.44	8.50
		10+10+10	2.17	2.17	2.17	-	6.50	2.50	7.10	1.46	0.55	1.90	6.54	2.44	8.50
		10+10+13	2.00	2.00	2.50	-	6.50	2.50	7.10	1.45	0.55	1.90	6.50	2.44	8.50
		10+10+18	1.72	1.72	3.07	-	6.50	2.50	7.20	1.44	0.55	1.90	6.45	2.44	8.50
		10+10+20	1.57	1.57	3.36	-	6.50	2.50	7.20	1.44	0.55	1.90	6.45	2.44	8.50
		10+10+24	1.43	1.43	3.63	-	6.50	2.50	7.20	1.43	0.55	1.90	6.41	2.44	8.50
	10+13+13	1.86	2.32	2.32	-	6.50	2.50	7.20	1.45	0.55	1.90	6.50	2.44	8.50	
	10+13+18	1.61	2.01	2.88	-	6.50	2.50	7.20	1.44	0.55	1.90	6.45	2.44	8.50	
	10+13+20	1.48	1.85	3.17	-	6.50	2.50	7.20	1.43	0.55	1.90	6.41	2.44	8.50	
	10+13+24	1.36	1.70	3.44	-	6.50	2.50	7.20	1.43	0.55	1.90	6.41	2.44	8.50	
	10+18+18	1.42	2.54	2.54	-	6.50	2.50	7.20	1.43	0.55	1.90	6.41	2.44	8.50	
	10+18+20	1.32	2.36	2.83	-	6.50	2.50	7.20	1.43	0.55	1.90	6.41	2.44	8.50	
	10+18+24	1.22	2.18	3.10	-	6.50	2.50	7.20	1.42	0.55	1.90	6.36	2.44	8.50	
	10+20+20	1.23	2.64	2.64	-	6.50	2.50	7.20	1.42	0.55	1.90	6.36	2.44	8.50	
	13+13+13	2.17	2.17	2.17	-	6.50	2.50	7.20	1.44	0.55	1.90	6.45	2.44	8.50	
	13+13+18	1.90	1.90	2.71	-	6.50	2.50	7.20	1.43	0.55	1.90	6.41	2.44	8.50	
13+13+20	1.75	1.75	3.00	-	6.50	2.50	7.20	1.43	0.55	1.90	6.41	2.44	8.50		
13+13+24	1.61	1.61	3.27	-	6.50	2.50	7.20	1.42	0.55	1.90	6.36	2.44	8.50		
13+18+18	1.69	2.41	2.41	-	6.50	2.50	7.20	1.43	0.55	1.90	6.41	2.44	8.50		
13+18+20	1.57	2.24	2.69	-	6.50	2.50	7.20	1.42	0.55	1.90	6.36	2.44	8.50		
13+18+24	1.46	2.08	2.96	-	6.50	2.50	7.20	1.42	0.55	1.90	6.36	2.44	8.50		
13+20+20	1.47	2.52	2.52	-	6.50	2.50	7.20	1.42	0.55	1.90	6.36	2.44	8.50		
18+18+18	2.17	2.17	2.17	-	6.50	2.50	7.20	1.42	0.55	1.90	6.36	2.44	8.50		
18+18+20	2.03	2.03	2.44	-	6.50	2.50	7.20	1.41	0.55	1.90	6.32	2.44	8.50		
18+18+24	1.90	1.90	2.70	-	6.50	2.50	7.20	1.41	0.55	1.90	6.32	2.44	8.50		
18+20+20	1.91	2.29	2.29	-	6.50	2.50	7.20	1.41	0.55	1.90	6.32	2.44	8.50		
4 Room	10+10+10+10	1.63	1.63	1.63	1.63	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+10+10+13	1.53	1.53	1.53	1.91	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+10+10+18	1.36	1.36	1.36	2.43	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+10+10+20	1.26	1.26	1.26	2.71	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+10+10+24	1.17	1.17	1.17	2.98	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+10+13+13	1.44	1.44	1.81	1.81	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+10+13+18	1.29	1.29	1.61	2.30	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+10+13+20	1.21	1.21	1.51	2.58	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+10+13+24	1.12	1.12	1.40	2.85	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+10+18+18	1.17	1.17	2.08	2.08	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+10+18+20	1.10	1.10	1.96	2.35	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+10+20+20	1.10	1.10	2.35	2.35	6.90	2.60	7.20	1.42	0.55	1.90	6.36	2.44	8.50	
	10+13+13+13	1.37	1.71	1.71	1.71	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+13+13+18	1.23	1.54	1.54	2.20	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44	8.50	
	10+13+13+20	1.15	1.44	1.44	2.47	6.50	2.60	7.20	1.30	0.55	1.90	5.83	2.44		



Inverter Multi Split System MXY Series (for HDB flats with current limitation 8.5A & 11A)

Outdoor Unit	Indoor Unit combination		Capacity of each indoor unit (kW)				Total capacity (kW)			Total power input (kW)			Total running current (A)		
	(A + B)		A	B	C	D	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.
MXY-4H38VG (11 A)	1 Room	10	2.80	-	-	-	2.80	1.40	3.80	0.62	0.43	0.90	2.75	1.91	3.99
		13	3.50	-	-	-	3.50	1.40	4.30	0.81	0.43	1.00	3.59	1.91	4.44
		18	5.00	-	-	-	5.00	1.60	5.80	1.23	0.47	1.73	5.46	2.09	7.68
		20	6.00	-	-	-	6.00	1.60	6.70	1.72	0.47	2.20	7.63	2.09	9.76
		24	7.00	-	-	-	7.00	1.60	7.00	2.45	0.47	2.48	10.87	2.09	11.00
	2 Room	10+10	2.80	2.80	-	-	5.60	2.00	7.50	1.46	0.59	2.48	6.48	2.60	11.00
		10+13	2.80	3.50	-	-	6.30	2.00	8.20	1.81	0.59	2.48	8.03	2.60	11.00
		10+18	2.51	4.49	-	-	7.00	2.00	8.90	2.13	0.59	2.48	9.45	2.60	11.00
		10+20	2.23	4.77	-	-	7.00	2.00	8.90	2.08	0.59	2.48	9.23	2.60	11.00
		10+24	1.98	5.02	-	-	7.00	2.00	9.00	2.03	0.59	2.48	9.01	2.60	11.00
		13+13	3.50	3.50	-	-	7.00	2.00	8.80	2.16	0.59	2.48	9.58	2.60	11.00
		13+18	2.88	4.12	-	-	7.00	2.00	8.90	2.10	0.59	2.48	9.32	2.60	11.00
		13+20	2.58	4.42	-	-	7.00	2.00	9.00	2.05	0.59	2.48	9.09	2.60	11.00
		13+24	2.31	4.69	-	-	7.00	2.00	9.10	2.01	0.59	2.48	8.92	2.60	11.00
		18+18	3.50	3.50	-	-	7.00	2.00	9.00	2.03	0.59	2.48	9.01	2.60	11.00
		18+20	3.18	3.82	-	-	7.00	2.10	9.10	1.99	0.59	2.48	8.83	2.60	11.00
		18+24	2.89	4.11	-	-	7.00	2.10	9.20	1.95	0.59	2.48	8.65	2.60	11.00
		20+20	3.50	3.50	-	-	7.00	2.10	9.20	1.95	0.59	2.48	8.65	2.60	11.00
		20+24	3.21	3.79	-	-	7.00	2.10	9.20	1.95	0.59	2.48	8.65	2.60	11.00
		3 Room	10+10+10	2.53	2.53	2.53	-	7.60	2.50	8.60	1.78	0.59	2.48	7.90	2.60
	10+10+13		2.34	2.34	2.92	-	7.60	2.50	8.70	1.76	0.59	2.48	7.81	2.60	11.00
	10+10+18		2.01	2.01	3.58	-	7.60	2.50	8.80	1.73	0.59	2.48	7.68	2.60	11.00
	10+10+20		1.83	1.83	3.93	-	7.60	2.50	8.80	1.72	0.59	2.48	7.63	2.60	11.00
	10+10+24		1.68	1.68	4.25	-	7.60	2.50	8.80	1.72	0.59	2.48	7.63	2.60	11.00
	10+13+13		2.17	2.71	2.71	-	7.60	2.50	8.70	1.75	0.59	2.48	7.76	2.60	11.00
	10+13+18		1.88	2.35	3.36	-	7.60	2.50	8.80	1.72	0.59	2.48	7.63	2.60	11.00
	10+13+20		1.73	2.16	3.71	-	7.60	2.50	8.80	1.72	0.59	2.48	7.63	2.60	11.00
	10+13+24		1.59	1.99	4.03	-	7.60	2.50	8.90	1.71	0.59	2.48	7.59	2.60	11.00
	10+18+18		1.66	2.97	2.97	-	7.60	2.50	8.90	1.71	0.59	2.48	7.59	2.60	11.00
	10+18+20		1.54	2.75	3.30	-	7.60	2.50	8.90	1.71	0.59	2.48	7.59	2.60	11.00
	10+18+24		1.43	2.55	3.62	-	7.60	2.50	8.90	1.70	0.59	2.48	7.54	2.60	11.00
	10+20+20		1.44	3.08	3.08	-	7.60	2.50	8.90	1.70	0.59	2.48	7.54	2.60	11.00
	13+13+13		2.53	2.53	2.53	-	7.60	2.50	8.80	1.73	0.59	2.48	7.68	2.60	11.00
	13+13+18		2.22	2.22	3.17	-	7.60	2.50	8.80	1.72	0.59	2.48	7.63	2.60	11.00
	13+13+20		2.05	2.05	3.51	-	7.60	2.50	8.90	1.71	0.59	2.48	7.59	2.60	11.00
	13+13+24		1.89	1.89	3.83	-	7.60	2.50	8.90	1.71	0.59	2.48	7.59	2.60	11.00
	13+18+18		1.97	2.81	2.81	-	7.60	2.50	8.90	1.71	0.59	2.48	7.59	2.60	11.00
	13+18+20		1.83	2.62	3.14	-	7.60	2.50	8.90	1.70	0.59	2.48	7.54	2.60	11.00
	13+18+24		1.71	2.44	3.46	-	7.60	2.50	8.90	1.68	0.59	2.48	7.45	2.60	11.00
	13+20+20	1.72	2.94	2.94	-	7.60	2.50	8.90	1.69	0.59	2.48	7.50	2.60	11.00	
	18+18+18	2.53	2.53	2.53	-	7.60	2.50	8.90	1.70	0.59	2.48	7.54	2.60	11.00	
	18+18+20	2.38	2.38	2.85	-	7.60	2.50	8.90	1.67	0.59	2.48	7.41	2.60	11.00	
	18+18+24	2.22	2.22	3.16	-	7.60	2.50	9.00	1.64	0.59	2.48	7.28	2.60	11.00	
	18+20+20	2.24	2.68	2.68	-	7.60	2.50	9.00	1.65	0.59	2.48	7.32	2.60	11.00	
	4 Room	10+10+10+10	1.90	1.90	1.90	1.90	7.60	3.00	9.10	1.40	0.59	2.48	6.21	2.60	11.00
		10+10+10+13	1.79	1.79	1.79	2.24	7.60	3.00	9.10	1.40	0.59	2.48	6.21	2.60	11.00
		10+10+10+18	1.59	1.59	1.59	2.84	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00
		10+10+10+20	1.48	1.48	1.48	3.17	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00
		10+10+10+24	1.37	1.37	1.37	3.48	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00
		10+10+13+13	1.69	1.69	2.11	2.11	7.60	3.00	9.20	1.40	0.59	2.48	6.21	2.60	11.00
		10+10+13+18	1.51	1.51	1.89	2.70	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00
		10+10+13+20	1.41	1.41	1.76	3.02	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00
10+10+13+24		1.31	1.31	1.64	3.33	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00	
10+10+18+18		1.36	1.36	2.44	2.44	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00	
10+10+18+20		1.28	1.28	2.29	2.75	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00	
10+10+20+20		1.27	1.27	2.73	2.73	8.00	3.00	9.20	1.62	0.59	2.48	7.19	2.60	11.00	
10+13+13+13		1.60	2.00	2.00	2.00	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00	
10+13+13+18		1.44	1.80	1.80	2.57	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00	
10+13+13+20		1.35	1.68	1.68	2.89	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00	
10+13+13+24		1.26	1.57	1.57	3.19	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00	
10+13+18+18		1.31	1.63	2.33	2.33	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00	
10+13+18+20		1.23	1.54	2.20	2.64	7.60	3.00	9.20	1.38	0.59	2.48	6.12	2.60	11.00	
13+13+13+13		1.90	1.90	1.90	1.90	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00	
13+13+13+18		1.72	1.72	1.72	2.45	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00	
13+13+13+20	1.61	1.61	1.61	2.76	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00		
13+13+13+24	1.51	1.51	1.51	3.07	7.60	3.00	9.20	1.38	0.59	2.48	6.12	2.60	11.00		
13+13+18+18	1.56	1.56	2.24	2.24	7.60	3.00	9.20	1.39	0.59	2.48	6.17	2.60	11.00		
MXY-2H20VF (8.5A)	1 Room	10	2.80	-	-	-	2.80	1.40	3.80	0.60	0.25	0.84	3.22	1.34	4.51
		13	3.50	-	-	-	3.50	1.40	4.30	0.79	0.25	1.05	4.24	1.34	5.64
		18	4.50	-	-	-	4.50	1.50	5.00	1.20	0.26	1.58	6.44	1.40	8.50
		20	4.50	-	-	-	4.50	1.60	5.50	1.18	0.27	1.58	6.33	1.45	8.50
	2 Room	10+10	2.00	2.00	-	-	4.00	1.50	5.60	0.81	0.32	1.58	4.35	1.72	8.50
		10+13	1.82	2.28	-	-	4.10	1.50	5.70	0.82	0.33	1.58	4.40	1.77	8.50
		10+18	1.47	2.63	-	-	4.10	1.60	5.70	0.83	0.33	1.58	4.46	1.77	8.50
		10+20	1.34	2.86	-	-	4.20	1.60	5.80	0.84	0.34	1.58	4.51	1.83	8.50
		13+13	2.05	2.05	-	-	4.10	1.50	5.70	0.83	0.33	1.58	4.46	1.77	8.50
		13+18	1.73	2.47	-	-	4.20	1.60	5.80	0.84	0.34	1.58	4.51	1.83	8.50
		13+20	1.66	2.84	-	-	4.50	1.70	5.80	0.91	0.34	1.58	4.88	1.83	8.50

\*Total Indoor Running current must not exceed 3Amps when connecting with PEY-M Series

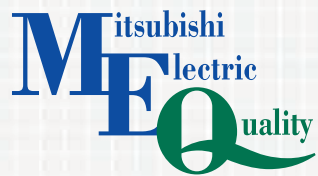

## The best quality you can rely on.


Our quality assurance program guided by our stringent Quality Policy ensures confidence in all phases of the development process from design and manufacture, to the finished product.



Line test




Sound test



Performance test



2000 Hour  
Endurance test



800 Hour  
Heat stress test



500 Hour  
Saltwater spray rust test



## Technical assistance within 24 hours.

At Mitsubishi Electric Asia, customers are our priority, which is why we provide attentive after-sales service to respond to your needs within 24 hours. Our service records show that upon receipt of a customer service request, more than 90% of them were completed on the same day, or the next working day. That is the kind of service you can look forward to, because it is our way of thanking you for putting your trust in Mitsubishi Electric.



Mitsubishi Electric  
**starMEX**  
 Air-Conditioner



**MITSUBISHI ELECTRIC ASIA PTE LTD**

307 Alexandra Road, Mitsubishi Electric Building, Singapore 159943

**Tel:** (65) 6473 2308 **Fax:** (65) 6476 0590 **Office Hours:** 8:30am - 5:30pm (Monday - Friday)

<https://www.MitsubishiElectric.com.sg>

Showroom Opening Hours:

Monday - Friday, 9am - 5pm

Closed on Saturday, Sunday and Public Holidays

Tel: (65) 6470 2600

