

Designed to install under wall mounting type air conditioners.
Ultra Quiet pump with strong performance.

Special features

- ① Designed for wall mounting type air conditioners
- ② Ultra Quiet pump with strong performance
- ③ Low power consumption
- ④ Removable reservoir for easy maintenance
- ⑤ Mesh filter inside of reservoir
- ⑥ Built-in safety switch



Technical specifications

- Power Supply : 110V~120V 60Hz or 220V~240V 50/60Hz
- Water Flow rate : Max. 29l/hr at 0 meter
- Discharge head : Max 8M
- Ambient temperature : 0°C ~ 50°C




Performance

Model	Power Supply	Performance(l/hr@Height in Meter)				Max. Lift		Amps	Watts
		0m	4m	6m	8m	Meter	Ft		
MD800UD	120V, 220V~230V 50~60Hz	29	19	15	12	8m	26ft	0.024A	2.5

Dimensions

Weight	Tank Capacity	O.D of Outlet
0.5kg	140ml	8mm

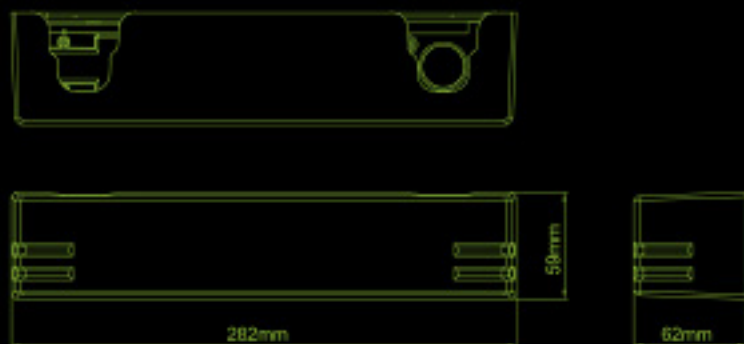

Distributed By:



12 Kallang Way North East Building
Singapore 349216
sales@northeast.com.sg
Tel: 67492832