



LG Air Conditioners

Make your life cool



Ahead of the Expected

Copyright © 2022 by LG HVAC Solutions All rights reserved.
 No part of this publication may be reproduced or distributed in any form or by any means, without the prior written permission of the publisher.

5-Tick Rating

Compact Size

ThinQ™

Plasmaster⁺ Ionizer^{PLUS}

WHY MULTI SPLIT R32 SMART INVERTER

LG's Multi Split system provides powerful, efficient cooling up to 4 indoor units operating from a single outdoor unit. The advanced inverter technology offers powerful performance while consuming less energy, space, as well as sound.

Sleek and elegant indoor units are fitting for all room sizes.

The R32 smart inverter can be easily installed and maintained.



Index



Climate friendly



Super energy efficiency **5-Tick Rating**



Perfect HDB fit **Compact Size**



Smarter life with **ThinQ™**



Enhanced air quality with **Plasmaster™ Ionizer^{PLUS}**


Line-up

Outdoor unit

Capacity	up to 18kBtu/h	up to 26kBtu/h	up to 28kBtu/h
Outdoor Units			
	 Z3UQ18GFA0	 Z3UQ26GFA0	 Z4UQ28GFA0
Connectable Indoor Units	Up to 3 indoor units	Up to 3 indoor units	Up to 4 indoor units

Indoor unit (Compatible: both R32 and R410A)


Capacity		9kBtu/h	12kBtu/h	18kBtu/h	24kBtu/h
Wall Mounted Type	ARTCOOL Mirror 	 AMNC09GDJR0	 AMNC12GDJR0	 AMNC18GDKR0	 AMNC24GDKR0
	ALPHA + 	 AMNQ09GSJC0	 AMNQ12GSJC0	 AMNQ18GSKC0	 AMNQ24GSKC0

 Wi-Fi embedded.

Climate friendly

R32

Next-Generation Refrigerant



R32 is the next generation refrigerant that efficiently carries heat and has lower environmental impact over R410A refrigerant.

R410A			R32	
2088		Lower Global Warming Potential	675	
		Less Amount Gas Charge	USES UP TO 20%	
More Refrigerant per kilowatt of the delivered capacity		More Efficient Performance	Less Refrigerant per kilowatt of the delivered capacity	
R32	R125	More Eco-Friendly Refrigerant	100%	
50%	50%			

Caution!


More precaution should be needed to use R32 refrigerant due to slightly higher toxicity level. Higher discharge temperature may cause oil degradation in the compressor, which may damage some of the components in it.

Super energy efficiency

5-Tick Rating

High Coefficient of Performance (COP) of the LG R32 will result in greater savings in the long run.

Weighted COP Comparison (LG vs MEPS)

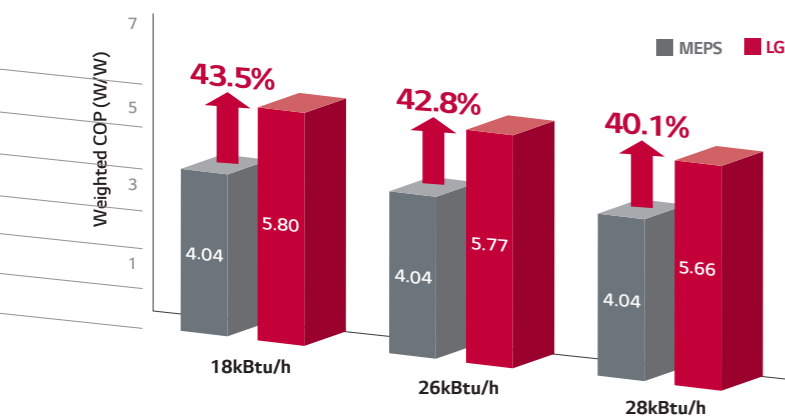

Singapore Energy Guide

	COP	WCOP		
5-tick	4.86 < COP	5.50 ≤ WCOP		
		18	26	28
Efficiency (W/W)	Full load COP	4.90	5.10	5.28
	Weighted COP	5.80	5.77	5.66
	Tick	5	5	5

MEPS: Minimum Energy Performance Standard



Super energy efficiency

Dual Inverter Compressor

Structured to optimize stability and to operate on low noise vibrations.



Twin Rotor

Stable Rotation / Low Noise / Low Vibration



Surface Coating

High Abrasion Resistance



Flow Optimization

Reduced Oil Discharge / Enhanced Oil Collection



Concentric Motor


Improved Oil Path Area / Low Calorific Value



Perfect HDB fit

Compact Size

Fit for HDB structure.

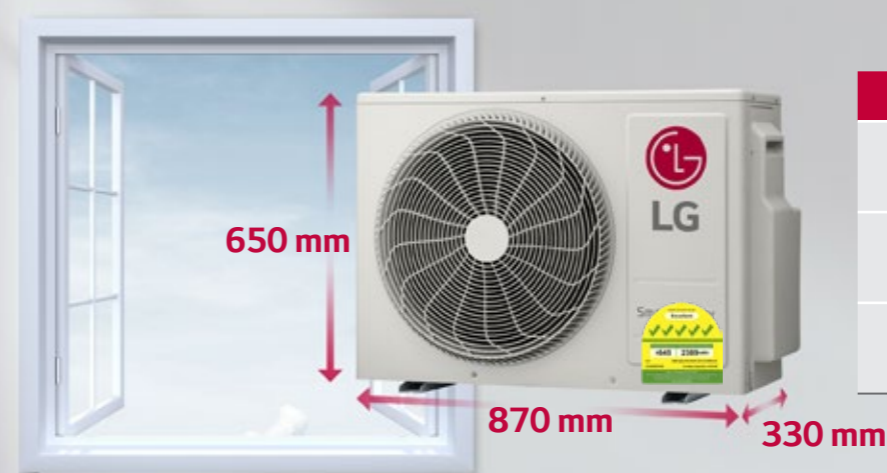

New	W x H x D
Z3UQ18GFA0	770 × 545 × 288
Z3UQ26GFA0	870 × 650 × 330
Z4UQ28GFA0	870 × 650 × 330

Smarter life

ThinQ™

Control the air conditioners with the smart internet devices.



AC Control from Anywhere



ThinQ™

- On / Off
- Mode Selections
- Temperature Setting
- Status Alerts
- Time Scheduler
- Filter Management
- Smart Diagnosis
- Vane Control

Mobile Remote Control*
Remote control via mobile phone

* Wi-Fi required


Enhanced air quality

Plasmaster™ Ionizer^{PLUS}

Sterilization and Deodorization



Plasmaster Ionizer+ reduces harmful microscopic particles by infusing the air passing through the air conditioner with over **3 millions ions**.

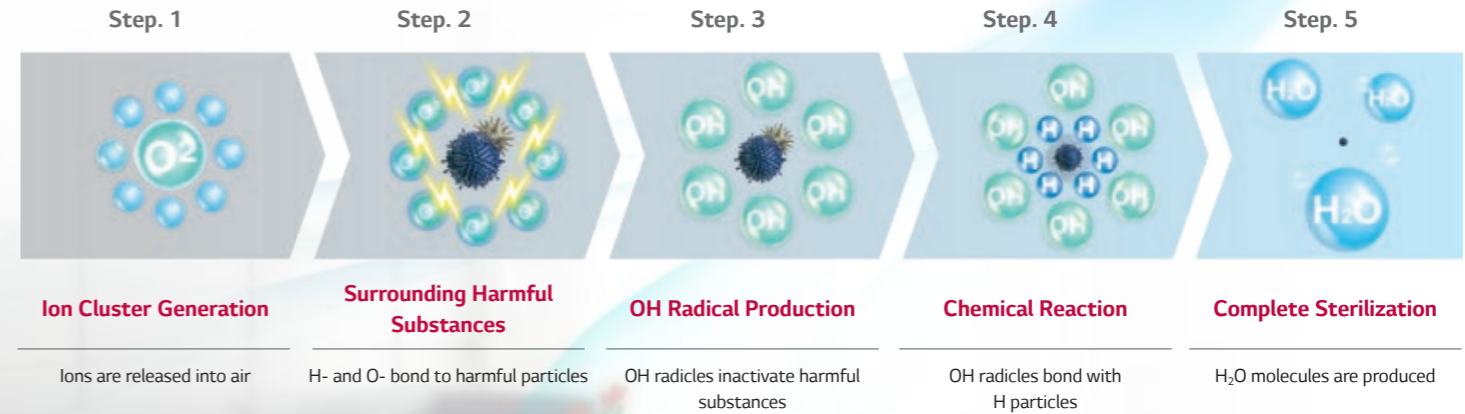

※ Only ARTCOOL Mirror has this function

Auto Cleaning

The interior of the air conditioner is maintained clean by drying off and sterilizing the heat exchanger. The comprehensive auto cleaning function prevents the formation of bacteria and mold on the heat exchanger, providing a more pleasant and comfortable environment



Removes Harmful Particles

Provides clean air by preventing bacteria, mold and odors that could accumulate in an indoor unit.



Results vary based on environment.
Detailed disclaimers apply. Please refer to <https://www.lg.com/sg> for more details.

Specification

OUTDOOR UNIT

Z3UQ18GFA0 / Z3UQ26GFA0 / Z4UQ28GFA0



Capacity		Unit	Z3UQ18GFA0	Z3UQ26GFA0	Z4UQ28GFA0
Major	Minor				
Classification	Chassis	-	U18A	U24A	U24A
Power Supply	#1	-	220-240, 1, 50/60	220-240, 1, 50/60	220-240, 1, 50/60
	Limit Range of Voltage (#1)	V	198 - 264	198 - 264	198 - 264
Testing Combination	-	Model x No.	AMNC09GDJRO x 3	AMNC09GDJRO x 3	AMNC09GDJRO x 4
Cooling Capacity	Rated	kW	5.20	6.40	7.50
		Btu/h	17,740	21,850	25,600
	Min - Max	kW	1.58 - 7.06	1.58 - 8.70	1.58 - 10.20
		Btu/h	5,400 - 24,100	5,400 - 29,700	5,400 - 34,800
Power Input (Cooling)	Rated	kW	1.06	1.25	1.42
	Min - Max	kW	0.41 - 2.16	0.38 - 2.43	0.38 - 3.08
Operation Range (Outdoor Temperature)	Min - Max	°C (°F) DB	-5 (23.0) - 48 (118.4)	-5 (23.0) - 48 (118.4)	-5 (23.0) - 48 (118.4)
Efficiency	EER	W/W	4.91	5.12	5.28
	WCOP	W/W	5.80	5.77	5.66
	Energy Label (Cooling)	-	5-tick	5-tick	5-tick
Running Current (Cooling)	Rated	A	4.9	5.6	6.4
	Min/Max	A	1.90 / 10.00	1.70 / 11.00	1.70 / 13.90
Running Current	Maximum Running Current	A	10.00	11.00	13.90
Outdoor Fan	Type	-	Propeller	Propeller	Propeller
	Air Flow Rate	m³/min x No.	43.3 x 1	50 x 1	50 x 1
Outdoor Fan Motor	Type	-	BLDC	BLDC	BLDC
	Output	W x No.	43 x 1	85.4 x 1	85.4 x 1
Compressor	Type	-	Twin Rotary	Twin Rotary	Twin Rotary
	Model x No.	-	DAT156MAD x 1	DKT208MAB x 1	DKT208MAB x 1
	Motor Type	-	BLDC	BLDC	BLDC
	Motor Output	W x No.	1,500 (at 60Hz) x 1	1,500 (at 60Hz) x 1	DKT208MAB x 1
	Oil Type	-	FW68D	FW68D	FW68D
Heat Exchanger	Oil Charging amount	cc x No.	400 x 1	670 x 1	670 x 1
	Rows x Columns x FPI	-	2 x 24 x 18	2 x 28 x 18	2 x 28 x 18
	No.	-	1	1	1
	Fin Type	-	Lower	Lower	Lower
	Material (Tube/Fin)	-	Cu / Al	Cu / Al	Cu / Al
Dimensions	Face Area	m²	0.41	0.51	0.51
	Net (W x H x D)	mm	770 x 545 x 288	870 x 650 x 330	870 x 650 x 330
	Shipping (W x H x D)	mm	920 x 588 x 388	1,046 x 713 x 461	1,046 x 713 x 461
Weight	Net	kg	34.7	44.2	44.6
	Shipping	kg	37.6	48.2	48.6
Exterior	Color	-	Warm gray	Warm gray	Warm gray
	RAL (Classic)	-	RAL 7044	RAL 7044	RAL 7044
Protection Device	Frost Prevention	-	Thermistor	Thermistor	Thermistor
	Discharge Temperature Control	-	Thermistor	Thermistor	Thermistor
	Inverter Protection	-	-	Pressure Sensor	Pressure Sensor
Refrigerant	Type	-	R32	R32	R32
	Precharged Amount	kg	1.100	1.300	1.400
	Additional Charging amount (Branch)	g/m	20	20	20
	GWP (Global Warming Potential)	-	675	675	675
	t-CO ₂ eq.	-	0.743	0.878	0.945
Pipe Connecting Socket	Chargeless-Pipe Length (Main)	m	30	30	40
	Control Type	-	EEV	EEV	EEV
	Liquid	mm (inch) x No.	Ø6.35 (1/4) x 3	Ø6.35 (1/4) x 3	Ø6.35 (1/4) x 4
Piping Length	Gas	mm (inch) x No.	Ø9.52 (3/8) x 3	Ø9.52 (3/8) x 3	Ø9.52 (3/8) x 4
	Connection Type (Liquid)	-	Flare	Flare	Flare
	Connection Type (Gas)	-	Flare	Flare	Flare
	Total Piping (Max)	m	50	60	70
Maximum Height Difference	Each Branch (Rated / Max / Min)	m	7.5 / 25 / -	7.5 / 25 / -	7.5 / 25 / -
	IDU - ODU (Max)	m	15	15	15
Sound Pressure Level (Outdoor Unit)	IDU - IDU (Max)	m	7.5	7.5	7.5
	Cooling / Heating (@ 1.5m height)	dB(A)	47.0 / -	49.0 / -	49.0 / -
Measurement Standard (Pressure Level)	-	-	ISO 3745	ISO 3745	ISO 3745
Connecting Cable	Power Supply Cable (H07RN-F) (to ODU)	mm² x cores	2.5 x 3C	2.5 x 3C	2.5 x 3C
	Minimum Circuit Amperes (MCA)	A	11.9	11.6	11.6
Electrical Characteristic	Maximum Fuse Amperes (MFA)	A	15	20	20
	Comp_Rated Load Amperes (Max)	A	9.0	12.0	12.0
	Outdoor Fan Motor_Full Load Amperes	A	0.25	0.33	0.33
Combination Limit	Number of Indoor Units	EA	3	3	4
Allowable Total Indoor Unit Connected Capacity	Min - Max	kBtu/h	9 - 36	9 - 42	9 - 51
Allowable Max. Capacity for individual Indoor unit	Max	kBtu/h	18	24	24

Specifications of Indoor Units

INDOOR UNIT ARTCOOL MIRROR



AMNC09GDJRO / AMNC12GDJRO / AMNC18GDKRO / AMNC24GDKRO



Capacity		Unit	AMNC09GDJRO	AMNC12GDJRO	AMNC18GDKRO	AMNC24GDKRO
Major	Minor					
Classification	Chassis	-	SJ (Artcool)	SJ (Artcool)	SK (Artcool)	SK (Artcool)
Power Supply	#1	-	220-230-240, 1, 50/60	220-230-240, 1, 50/60	220-230-240, 1, 50/60	220-230-240, 1, 50/60
	Limit Range of Voltage (#1)	V	198 - 264	198 - 264	198 - 264	198 - 264
Power Input (Indoor)	H/M/L	W	30 / 18 / 9	30 / 19 / 9	60 / 39 / 26	60 / 45 / 27
Running Current	Maximum Running Current	A	0.2	0.2	0.4	0.4
Running Current (Indoor)	H/M/L	A	0.20 / 0.16 / 0.12	0.20 / 0.17 / 0.12	0.40 / 0.28 / 0.22	0.40 / 0.33 / 0.24
Indoor Fan	Type	-	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
	Air Flow Rate (Cooling,SH)/H/M/L	m³/min	- / 7.7 / 6.4 / 5.0	- / 8.1 / 6.7 / 5.3	- / 14.2 / 11.3 / 9.9	- / 15.2 / 12.7 / 10.2
Indoor Fan Motor	Type	-	BLDC	BLDC	BLDC	BLDC
	Drive	-	Internal	Internal	Internal	Internal
	Output	W	30	30	60	60
Heat Exchanger	No.	-	1	1	1	1
	Face Area	m²	0.20	0.20	0.28	0.28
Dimensions	Net (W x H x D)	mm	837 x 308 x 192	837 x 308 x 192	998 x 345 x 212	998 x 345 x 212
	Shipping (W x H x D)	mm	909 x 383 x 256	909 x 383 x 256	1,063 x 420 x 274	1,063 x 420 x 274
Weight	Net	kg	9.2	9.2	12.1	12.7
	Shipping	kg	11.4	11.4	15.9	16.5
Exterior	Color	-	Munsell 7.5PB 0.2/20	Munsell 7.5PB 0.2/20	Munsell 7.5PB 0.2/20	Munsell 7.5PB 0.2/20
	RAL (Classic)	-	RAL 9005	RAL 9005	RAL 9005	RAL 9005
Protection Device	Fuse	-	0	0	0	0
	Overload Protector for Fan Motor	-	0	0	0	0
Refrigerant	Type	-	R410A / R32	R410A / R32	R410A / R32	R410A / R32
	Control Type	-	-	-	-	-
Piping Connection	O.D / I.D (Natural Drainage)	mm (inch)	Ø21.5 (27/32) / 16 (5/8)	Ø21.5 (27/32) / 16 (5/8)	Ø21.5 (27/32) / 16 (5/8)	Ø21.5 (27/32) / 16 (5/8)
	Liquid	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
Pipe Connecting Socket	Gas	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Liquid (Indoor Unit)	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas (Indoor Unit)	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Connection Type (Liquid)	-	Flare	Flare	Flare	Flare
Sound Pressure Level (Indoor Unit)	Connection Type (Gas)	-	Flare	Flare	Flare	Flare
	Cooling ((SH) / H / M / L)	dB(A)	- / 36.0 / 32.0 / 27.0	- / 38.0 / 34.0 / 29.0	- / 44.0 / 38.0 / 34.0	- / 46.0 / 41.0 / 36.0
Measurement Standard (Pressure Level)	-	-	ISO 3745	ISO 3745	ISO 3745	ISO 3745
Connecting Cable	Power and Communication cable (H07RN-F)	mm² x cores	0.75 x 4C	0.75 x 4C	0.75 x 4C	0.75 x 4C
Power Supply Type to Indoor	-	-	Supplied from ODU	Supplied from ODU	Supplied from ODU	Supplied from ODU
Electrical Characteristic	Indoor Fan Motor_Full Load Amperes (FLA)	A	0.2	0.2	0.4	0.4

Wall Mounted Single Split

INDOOR UNIT ALPHA +



AMNQ09GSJCO / AMNQ12GSJCO / AMNQ18GSKCO / AMNQ24GSKCO



Capacity		Unit	AMNQ09GSJCO	AMNQ12GSJCO	AMNQ18GSKCO	AMNQ24GSKCO
Major	Minor					
Classification	Chassis	-	SJ (Specialized)	SJ (Specialized)	SK (Specialized)	SK (Specialized)
Power Supply	#1	-	220-230-240, 1, 50/60	220-230-240, 1, 50/60	220-230-240, 1, 50/60	220-230-240, 1, 50/60
	Limit Range of Voltage (#1)	V	198 - 264	198-264	198-264	198-264
Power Input (Indoor)	H / M / L	W	30 / 18 / 11	30 / 19 / 11	60 / 40 / 24	60 / 45 / 27
Running Current	Maximum Running Current	A	0.2	0.2	0.4	0.4
Running Current (Indoor)	H / M / L	A	0.20 / 0.16 / 0.10	0.20 / 0.17 / 0.10	0.40 / 0.28 / 0.20	0.40 / 0.33 / 0.24
Indoor Fan	Type	-	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
	Air Flow Rate (Cooling, (SH) / H / M / L)	m³/min	- / 9.2 / 7.4 / 5.6	- / 9.6 / 8.1 / 5.6	- / 15.8 / 12.4 / 10.0	- / 16.9 / 12.8 / 10.4
Indoor Fan Motor	Type	-	BLDC	BLDC	BLDC	BLDC
	Drive	-	Internal	Internal	Internal	Internal
	Output	W	30	30	30	60
Heat Exchanger	Rows x Columns x FPI	-	2 x 15 x 21	2 x 15 x 21	2 x 16 x 20	2 x 16 x 20
	No.	-	1	1	1	1
Dimensions	Net (W x H x D)	mm	818 x 316 x 189	818 x 316 x 189	975 x 354 x 209	975 x 354 x 209
	Shipping (W x H x D)	mm	892 x 381 x 249	892 x 381 x 249	1,063 x 420 x 274	1,063 x 420 x 274
Weight	Net	kg	8.9	8.9	11.4	12.2
	Shipping	kg	10.2	10.2	13.2	13.9
Exterior	Color	-	Munsell 7.5BG 10/2	Munsell 7.5BG 10/2	Munsell 7.5BG 10/2	Munsell 7.5BG 10/2
	RAL (Classic)	-	RAL 9016	RAL 9016	RAL 9016	RAL 9016
Protection Device	Fuse	-	0	0	0	0
	Overload Protector for Fan Motor	-	0	0	0	0
Refrigerant	Type	-	R410A / R32	R410A / R32	R410A / R32	R410A / R32
	Control Type	-	-	-	-	-
Drain Pipe (Natural Drainage)	O.D./I.D.	mm (inch)	Ø21.5 (27/32) / 16 (5/8)	Ø21.5 (27/32) / 16 (5/8)	Ø21.5 (27/32) / 16 (5/8)	Ø21.5 (27/32) / 16 (5/8)
Piping Connection	Liquid	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)
Pipe Connecting Socket	Liquid (Indoor Unit)	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas (Indoor Unit)	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Connection Type (Liquid)	-	Flare	Flare	Flare	Flare
	Connection Type (Gas)	-	Flare	Flare	Flare	Flare
Sound Pressure Level (Indoor Unit)	Cooling ((SH) / H / M / L)	dB(A)	- / 36.0 / 33.0 / 27.0	- / 40.0 / 35.0 / 27.0	- / 44.0 / 38.0 / 34.0	- / 46.0 / 41.0 / 36.0
Measurement Standard (Pressure Level)			ISO 3745	ISO 3745	ISO 3745	ISO 3745
Connecting Cable	Power and Communication cable (H07RN-F)	mm² x cores	0.75 x 4C	0.75 x 4C	0.75 x 4C	0.75 x 4C
Power Supply Type to Indoor	-	-	Supplied from ODU	Supplied from ODU	Supplied from ODU	Supplied from ODU
Electrical Characteristic	Indoor Fan Motor_Full Load Amperes (FLA)	A	0.2	0.2	0.4	0.4

Combination Table

Z3UQ18GFA0 Cooling_Combination of 8.5 Ampere Limited

No. of Room	Combination (kW)				Capacity of Each Indoor Unit (kW)			Total Capacity (kW)			Total Input (W)			Total Current (A)		
	Unit-A	Unit-B	Unit-C	Total	Unit-A	Unit-B	Unit-C	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max
1	2.6	-	-	2.6	2.6	-	-	1.58	2.64	3.55	410	690	990	1.9	3.2	4.6
	3.5	-	-	3.5	3.5	-	-	2.11	3.52	4.75	530	890	1,380	2.5	4.1	6.4
	5.3	-	-	5.3	5.2	-	-	3.12	5.20	5.67	770	1,360	1,830	3.6	6.3	8.5
2	2.6	2.6	-	5.3	2.6	2.6	-	3.12	5.20	5.78	650	1,130	1,830	3.0	5.2	8.5
	2.6	3.5	-	6.2	2.2	3.0	-	3.12	5.20	5.78	650	1,130	1,830	3.0	5.2	8.5
	3.5	3.5	-	7.0	2.6	2.6	-	3.12	5.20	5.78	650	1,130	1,830	3.0	5.2	8.5
	2.6	5.3	-	7.9	1.7	3.5	-	3.12	5.20	5.78	650	1,130	1,830	3.0	5.2	8.5
	3.5	5.3	-	8.8	2.1	3.1	-	3.12	5.20	5.78	650	1,130	1,830	3.0	5.2	8.5
3	2.6	2.6	2.6	7.9	1.7	1.7	1.7	3.12	5.20	6.18	590	1,060	1,830	2.7	4.9	8.5
	2.6	2.6	3.5	8.8	1.6	1.6	2.1	3.12	5.20	6.18	590	1,060	1,830	2.7	4.9	8.5
	2.6	3.5	3.5	9.7	1.4	1.9	1.9	3.12	5.20	6.18	590	1,060	1,830	2.7	4.9	8.5
	3.5	3.5	3.5	10.6	1.7	1.7	1.7	3.12	5.20	6.18	590	1,060	1,830	2.7	4.9	8.5

Z3UQ18GFA0 Cooling_Combination of Full Load Ampere

No. of Room	Combination (kW)				Capacity of Each Indoor Unit (kW)			Total Capacity (kW)			Total Input (W)			Total Current (A)		
	Unit-A	Unit-B	Unit-C	Total	Unit-A	Unit-B	Unit-C	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max
1	2.6	-	-	2.6	2.6	-	-	1.58	2.64	3.55	410	680	990	1.9	3.1	4.6
	3.5	-	-	3.5	3.5	-	-	2.11	3.52	4.75	530	890	1,380	2.5	4.1	6.4
	5.3	-	-	5.3	5.2	-	-	3.12	5.20	6.62	770	1,360	1,960	3.6	6.3	9.1
2	2.6	2.6	-	5.3	2.6	2.6	-	3.12	5.20	6.76	650	1,130	2,160	3.0	5.2	10.0
	2.6	3.5	-	6.2	2.2	3.0	-	3.12	5.20	6.76	650	1,130	2,160	3.0	5.2	10.0
	3.5	3.5	-	7.0	2.6	2.6	-	3.12	5.20	6.76	650	1,130	2,160	3.0	5.2	10.0
	2.6	5.3	-	7.9	1.7	3.5	-	3.12	5.20	6.76	650	1,130	2,160	3.0	5.2	10.0
	3.5	5.3	-	8.8	2.1	3.1	-	3.12	5.20	6.76	650	1,130	2,160	3.0	5.2	10.0
3	2.6	2.6	2.6	7.9	1.7	1.7	1.7	3.12	5.20	7.06	590	1,060	2,040	2.7	4.9	9.4
	2.6	2.6	3.5	8.8	1.6	1.6	2.1	3.12	5.20	7.06	590	1,060	2,040	2.7	4.9	9.4
	2.6	3.5	3.5	9.7	1.4	1.9	1.9	3.12	5.20	7.06	590	1,060	2,040	2.7	4.9	9.4
	3.5	3.5	3.5	10.6	1.7	1.7	1.7	3.12	5.20	7.06	590	1,060	2,040	2.7	4.9	9.4

Note

Capacities are based on the following conditions:

- Cooling: Indoor Ambient Temp. 27° CDB / 19° CWB, Outdoor Ambient Temp. 35° CDB / 24° CWB
- Interconnected piping is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0 m.

At least two indoor units should be connected. And minimum limit of combination ratio is 40% approximately for rated capacity of outdoor unit. Don't exceed the maximum connectable indoor units number, it can be found in Specifications or combination table of outdoor unit model.

Combination Table

Z3UQ26GFA0 Cooling_Combination of 8.5 Ampere Limited

No. of Room	Combination (kW)				Capacity of Each Indoor Unit (kW)			Total Capacity (kW)			Total Input (W)			Total Current (A)		
	Unit-A	Unit-B	Unit-C	Total	Unit-A	Unit-B	Unit-C	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max
1	2.6	-	-	2.6	2.6	-	-	1.58	2.64	3.55	380	580	940	1.7	2.6	4.3
	3.5	-	-	3.5	3.5	-	-	2.11	3.52	4.75	480	820	1,320	2.2	3.7	6.0
	5.3	-	-	5.3	5.3	-	-	3.17	5.28	6.62	720	1,300	1,850	3.3	5.9	8.4
	7.0	-	-	7.0	6.4	-	-	3.84	6.40	6.98	870	1,540	1,870	3.9	7.0	8.5
2	2.6	2.6	-	5.3	2.6	2.6	-	3.17	5.28	6.86	650	1,180	1,660	2.9	5.3	7.5
	2.6	3.5	-	6.2	2.6	3.5	-	3.69	6.15	7.03	780	1,420	1,870	3.5	6.4	8.5
	3.5	3.5	-	7.0	3.2	3.2	-	3.84	6.40	7.03	800	1,460	1,870	3.6	6.6	8.5
	2.6	5.3	-	7.9	2.1	4.3	-	3.84	6.40	7.03	800	1,460	1,870	3.6	6.6	8.5
	3.5	5.3	-	8.8	2.6	3.8	-	3.84	6.40	7.03	800	1,460	1,870	3.6	6.6	8.5
	2.6	7.0	-	9.7	1.7	4.7	-	3.84	6.40	7.03	800	1,460	1,870	3.6	6.6	8.5
	5.3	5.3	-	10.6	3.2	3.2	-	3.84	6.40	7.03	800	1,460	1,870	3.6	6.6	8.5
	3.5	7.0	-	10.6	2.1	4.3	-	3.84	6.40	7.03	800	1,460	1,870	3.6	6.6	8.5
	5.3	7.0	-	12.3	2.7	3.7	-	3.84	6.40	7.03	800	1,460	1,870	3.6	6.6	8.5
3	2.6	2.6	2.6	7.9	2.1	2.1	2.1	3.84	6.40	7.85	690	1,250	1,870	3.1	5.6	8.5
	2.6	2.6	3.5	8.8	1.9	1.9	2.6	3.84	6.40	7.85	690	1,250	1,870	3.1	5.6	8.5
	2.6	3.5	3.5	9.7	1.7	2.3	2.3	3.84	6.40	7.85	690	1,250	1,870	3.1	5.6	8.5
	2.6	2.6	5.3	10.6	1.6	1.6	3.2	3.84	6.40	7.85	690	1,250	1,870	3.1	5.6	8.5
	3.5	3.5	3.5	10.6	2.1	2.1	2.1	3.84	6.40	7.85	690	1,250	1,870	3.1	5.6	8.5
	2.6	3.5	5.3	11.4	1.5	2.0	3.0	3.84	6.40	7.85	690	1,250	1,870	3.1	5.6	8.5
	2.6	2.6	7.0	12.3	1.4	1.4	3.7	3.84	6.40	7.85	690	1,250	1,870	3.1	5.6	8.5
	3.5	3.5	5.3	12.3	1.8	1.8	2.7	3.84	6.40	7.85	690	1,250	1,870	3.1	5.6	8.5

Z3UQ26GFA0 Cooling_Combination of Full Load Ampere

No. of Room	Combination (kW)				Capacity of Each Indoor Unit (kW)			Total Capacity (kW)			Total Input (W)			Total Current (A)		
	Unit-A	Unit-B	Unit-C	Total	Unit-A	Unit-B	Unit-C	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max
1	2.6	-	-	2.6	2.6	-	-	1.58	2.64	3.55	380	580	940	1.7	2.6	4.3
	3.5	-	-	3.5	3.5	-	-	2.11	3.52	4.75	480	820	1,320	2.2	3.7	6.0
	5.3	-	-	5.3	5.3	-	-	3.17	5.28	6.62	720	1,300	1,850	3.3	5.9	8.4
	7.0	-	-	7.0	6.4	-	-	3.84	6.40	7.30	870	1,540	2,390	3.9	7.0	10.8
2	2.6	2.6	-	5.3	2.6	2.6	-	3.17	5.28	6.86	650	1,180	1,660	2.9	5.3	7.5
	2.6	3.5	-	6.2	2.6	3.5	-	3.69	6.15	7.39	780	1,420	2,300	3.5	6.4	10.4
	3.5	3.5	-	7.0	3.2	3.2	-	3.84	6.40	7.94	800	1,460	2,430	3.6	6.6	11.0
	2.6	5.3	-	7.9	2.1	4.3	-	3.84	6.40	7.94	800	1,460	2,430	3.6	6.6	11.0
	3.5	5.3	-	8.8	2.6	3.8	-	3.84	6.40	7.94	800	1,460	2,430	3.6	6.6	11.0
	2.6	7.0	-	9.7	1.7	4.7	-	3.84	6.40	7.94	800	1,460	2,430	3.6	6.6	11.0
	5.3	5.3	-	10.6	3.2	3.2	-	3.84	6.40	7.94	800	1,460	2,430	3.6	6.6	11.0
	3.5	7.0	-	10.6	2.1	4.3	-	3.84	6.40	7.94	800	1,460	2,430	3.6	6.6	11.0
	5.3	7.0	-	12.3	2.7	3.7	-	3.84	6.40	7.94	800	1,460	2,430	3.6	6.6	11.0
	3	2.6	2.6	2.6	7.9	2.1	2.1	2.1	3.84	6.40	8.70	690	1,250	2,390	3.1	5.6
2.6		2.6	3.5	8.8	1.9	1.9	2.6	3.84	6.40	8.70	690	1,250	2,390	3.1	5.6	10.8
2.6		3.5	3.5	9.7	1.7	2.3	2.3	3.84	6.40	8.70	690	1,250	2,390	3.1	5.6	10.8
2.6		2.6	5.3	10.6	1.6	1.6	3.2	3.84	6.40	8.70	690	1,250	2,390	3.1	5.6	10.8
3.5		3.5	3.5	10.6	2.1	2.1	2.1	3.84	6.40	8.70	690	1,250	2,390	3.1	5.6	10.8
2.6		3.5	5.3	11.4	1.5	2.0	3.0	3.84	6.40	8.70	690	1,250	2,390	3.1	5.6	10.8
2.6		2.6	7.0	12.3	1.4	1.4	3.7	3.84	6.40	8.70	690	1,250	2,390	3.1	5.6	10.8
3.5		3.5	5.3	12.3	1.8	1.8	2.7	3.84	6.40	8.70	690	1,250	2,390	3.1	5.6	10.8

Note

Capacities are based on the following conditions:
 - Cooling : Indoor Ambient Temp. 27° CDB / 19° CWB, Outdoor Ambient Temp. 35° CDB / 24° CWB
 - Interconnected piping is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0 m.
 At least two indoor units should be connected. And minimum limit of combination ratio is 40% approximately for rated capacity of outdoor unit.
 Don't exceed the maximum connectable indoor units number, it can be found in Specifications or combination table of outdoor unit model.

Combination Table

Z4UQ28GFA0 Cooling_Combination of 8.5 Ampere Limited

No. of Room	Combination (kW)					Capacity of Each Indoor Unit (kW)				Total Capacity (kW)			Total Input (W)			Total Current (A)			
	Unit-A	Unit-B	Unit-C	Unit-D	Total	Unit-A	Unit-B	Unit-C	Unit-D	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max	
1	2.6	-	-	-	2.6	2.6	-	-	-	1.58	2.64	3.55	380	580	940	1.7	2.6	4.3	
	3.5	-	-	-	3.5	3.5	-	-	-	2.11	3.52	4.75	480	820	1,320	2.2	3.7	6.0	
	5.3	-	-	-	5.3	5.3	-	-	-	3.17	5.28	6.62	720	1,300	1,790	3.3	5.9	8.1	
	7.0	-	-	-	7.0	7.0	-	-	-	4.19	6.98	6.98	1,110	1,870	1,870	5.0	8.5	8.5	
2	2.6	2.6	-	-	5.3	2.6	2.6	-	-	3.17	5.28	6.86	660	1,180	1,660	3.0	5.3	7.5	
	2.6	3.5	-	-	6.2	2.6	3.5	-	-	3.69	6.15	7.03	920	1,420	1,870	4.2	6.4	8.5	
	3.5	3.5	-	-	7.0	3.5	3.5	-	-	4.22	7.03	7.03	1,060	1,870	1,870	4.8	8.5	8.5	
	2.6	5.3	-	-	7.9	2.3	4.7	-	-	4.51	7.03	7.03	1,090	1,870	1,870	4.9	8.5	8.5	
	3.5	5.3	-	-	8.8	2.8	4.2	-	-	4.51	7.03	7.03	1,090	1,870	1,870	4.9	8.5	8.5	
	2.6	7.0	-	-	9.7	1.9	5.1	-	-	4.51	7.03	7.03	1,090	1,870	1,870	4.9	8.5	8.5	
	3.5	7.0	-	-	10.6	2.3	4.7	-	-	4.51	7.03	7.03	1,090	1,870	1,870	4.9	8.5	8.5	
	5.3	5.3	-	-	10.6	3.5	3.5	-	-	4.51	7.03	7.03	1,090	1,870	1,870	4.9	8.5	8.5	
	5.3	7.0	-	-	12.3	3.0	4.0	-	-	4.51	7.03	7.03	1,090	1,870	1,870	4.9	8.5	8.5	
	7.0	7.0	-	-	14.1	3.5	3.5	-	-	4.51	7.03	7.03	1,090	1,870	1,870	4.9	8.5	8.5	
	3	2.6	2.6	2.6	-	7.9	2.5	2.5	2.5	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5
		2.6	2.6	3.5	-	8.8	2.3	2.3	3.0	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5
		2.6	3.5	3.5	-	9.7	2.0	2.7	2.7	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5
		2.6	2.6	5.3	-	10.6	1.9	1.9	3.8	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5
3.5		3.5	3.5	-	10.6	2.5	2.5	2.5	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5	
2.6		3.5	5.3	-	11.4	1.7	2.3	3.5	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5	
2.6		2.6	7.0	-	12.3	1.6	1.6	4.3	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5	
3.5		3.5	5.3	-	12.3	2.1	2.1	3.2	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5	
2.6		3.5	7.0	-	13.2	1.5	2.0	4.0	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5	
2.6		5.3	5.3	-	13.2	1.5	3.0	3.0	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5	
3.5		3.5	7.0	-	14.1	1.9	1.9	3.8	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5	
3.5		5.3	5.3	-	14.1	1.9	2.8	2.8	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5	
2.6		5.3	7.0	-	14.9	1.3	2.6	3.5	-	4.51	7.50	7.85	960	1,760	1,870	4.3	8.0	8.5	
4		2.6	2.6	2.6	2.6	10													

Combination Table

Z4UQ28GFA0 Cooling_Combination of Full Load Ampere

No. of Room	Combination (kW)					Capacity of Each Indoor Unit (kW)				Total Capacity (kW)			Total Input (W)			Total Current (A)		
	Unit-A	Unit-B	Unit-C	Unit-D	Total	Unit-A	Unit-B	Unit-C	Unit-D	Min	Rated	Max	Min	Rated	Max	Min	Rated	Max
1	2.6	-	-	-	2.6	2.6	-	-	-	1.58	2.64	3.55	380	580	940	1.7	2.6	4.3
	3.5	-	-	-	3.5	3.5	-	-	-	2.11	3.52	4.75	480	820	1,320	2.2	3.7	6.0
	5.3	-	-	-	5.3	5.3	-	-	-	3.17	5.28	6.62	720	1,300	1,790	3.3	5.9	8.1
	7.0	-	-	-	7.0	7.0	-	-	-	4.22	7.03	8.06	1,110	1,940	2,720	5.0	8.8	12.3
2	2.6	2.6	-	-	5.3	2.6	2.6	-	-	3.17	5.28	6.86	660	1,180	1,660	3.0	5.3	7.5
	2.6	3.5	-	-	6.2	2.6	3.5	-	-	3.69	6.15	7.39	920	1,420	2,300	4.2	6.4	10.4
	3.5	3.5	-	-	7.0	3.5	3.5	-	-	4.22	7.03	8.44	1,060	1,870	2,630	4.8	8.5	11.9
	2.6	5.3	-	-	7.9	2.5	5.0	-	-	4.51	7.50	9.22	1,090	2,030	2,870	4.9	9.2	13.0
	3.5	5.3	-	-	8.8	3.0	4.5	-	-	4.51	7.50	9.22	1,090	2,030	2,870	4.9	9.2	13.0
	2.6	7.0	-	-	9.7	2.0	5.5	-	-	4.51	7.50	9.22	1,090	2,030	2,870	4.9	9.2	13.0
	3.5	7.0	-	-	10.6	2.5	5.0	-	-	4.51	7.50	9.22	1,090	2,030	2,870	4.9	9.2	13.0
	5.3	5.3	-	-	10.6	3.8	3.8	-	-	4.51	7.50	9.22	1,090	2,030	2,870	4.9	9.2	13.0
	5.3	7.0	-	-	12.3	3.2	4.3	-	-	4.51	7.50	9.22	1,090	2,030	2,870	4.9	9.2	13.0
	7.0	7.0	-	-	14.1	3.8	3.8	-	-	4.51	7.50	9.22	1,090	2,030	2,870	4.9	9.2	13.0
3	2.6	2.6	2.6	-	7.9	2.5	2.5	2.5	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	2.6	2.6	3.5	-	8.8	2.3	2.3	3.0	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	2.6	3.5	3.5	-	9.7	2.0	2.7	2.7	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	2.6	2.6	5.3	-	10.6	1.9	1.9	3.8	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	3.5	3.5	3.5	-	10.6	2.5	2.5	2.5	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	2.6	3.5	5.3	-	11.4	1.7	2.3	3.5	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	2.6	2.6	7.0	-	12.3	1.6	1.6	4.3	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	3.5	3.5	5.3	-	12.3	2.1	2.1	3.2	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	2.6	3.5	7.0	-	13.2	1.5	2.0	4.0	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	2.6	5.3	5.3	-	13.2	1.5	3.0	3.0	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	3.5	3.5	7.0	-	14.1	1.9	1.9	3.8	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	3.5	5.3	5.3	-	14.1	1.9	2.8	2.8	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
	2.6	5.3	7.0	-	14.9	1.3	2.6	3.5	-	4.51	7.50	9.64	960	1,760	2,960	4.3	8.0	13.4
4	2.6	2.6	2.6	2.6	10.6	1.9	1.9	1.9	1.9	4.51	7.50	10.20	780	1,420	3,080	3.5	6.4	13.9
	2.6	2.6	2.6	3.5	11.4	1.7	1.7	1.7	2.3	4.51	7.50	10.20	780	1,420	3,080	3.5	6.4	13.9
	2.6	2.6	3.5	3.5	12.3	1.6	1.6	2.1	2.1	4.51	7.50	10.20	780	1,420	3,080	3.5	6.4	13.9
	2.6	2.6	2.6	5.3	13.2	1.5	1.5	1.5	3.0	4.51	7.50	10.20	780	1,420	3,080	3.5	6.4	13.9
	2.6	3.5	3.5	3.5	13.2	1.5	2.0	2.0	2.0	4.51	7.50	10.20	780	1,420	3,080	3.5	6.4	13.9
	2.6	2.6	3.5	5.3	14.1	1.4	1.4	1.9	2.8	4.51	7.50	10.20	780	1,420	3,080	3.5	6.4	13.9
	3.5	3.5	3.5	3.5	14.1	1.9	1.9	1.9	1.9	4.51	7.50	10.20	780	1,420	3,080	3.5	6.4	13.9
	2.6	2.6	2.6	7.0	14.9	1.3	1.3	1.3	3.5	4.51	7.50	10.20	780	1,420	3,080	3.5	6.4	13.9
	2.6	3.5	3.5	5.3	14.9	1.3	1.8	1.8	2.6	4.51	7.50	10.20	780	1,420	3,080	3.5	6.4	13.9

Note

Capacities are based on the following conditions:

- Cooling: Indoor Ambient Temp. 27° CDB / 19° CWB, Outdoor Ambient Temp. 35° CDB / 24° CWB

- Interconnected piping is standard length and difference of Elevation (Outdoor - Indoor Unit) is 0 m.

At least two indoor units should be connected. And minimum limit of combination ratio is 40% approximately for rated capacity of outdoor unit.

Don't exceed the maximum connectable indoor units number, it can be found in Specifications or combination table of outdoor unit model.